
AP3404

N-Channel Enhancement Mosfet

DATA SHEET

Feature

- 30V,5.8A
  $R_{DS(ON)}$ <25mΩ @V_{GS}=10V TYP=18 mΩ
  $R_{DS(ON)}$ <40mΩ @V_{GS}=4.5V TYP=28 mΩ
- Advanced Trench Technology
- Lead free product is acquired



Application

- Interfacing Switching
- Load Switching
- Power management



SOT-23 top view

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity (PCS)
3404	AP3404	Sot-23	7 inch	-	3000

ABSOLUTE MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	±20	V
Continuous Drain Current (T_a =25℃)	I_D	5.8	A
Continuous Drain Current (T_a =70℃)	I_D	4.2	A
Pulsed Drain Current	I_{DM}	23	A
Power Dissipation	P_D	1.36	W
Thermal Resistance from Junction to Ambient(4)	$R_{\theta JA}$	92	℃/W
Junction Temperature	T_J	150	℃
Storage Temperature	T_{STG}	-55~ +150	℃

MOSFET ELECTRICAL CHARACTERISTICS(T_a=25℃ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D =250μA	30	-	-	V
Zero gate voltage drain current	I_{DSS}	V_{DS} =30V, V_{GS} = 0V	-	-	1	μA
Gate-body leakage current	I_{GSS}	V_{GS} =±20V,V_{DS} = 0V	-	-	±100	nA
Gate threshold voltage(3)	$V_{GS(th)}$	V_{DS} =V_{GS}, I_D =250μA	1.0	1.5	2.5	V
Drain-source on-resistance(3)	$R_{DS(on)}$	V_{GS} =10V, I_D =5.8A	-	18	25	mΩ
		V_{GS} =4.5V, I_D =4.5A	-	28	40	
Dynamic characteristics						
Input Capacitance	C_{iss}	V_{DS} =15V, V_{GS} =0V, f =1MHz	-	490	-	pF
Output Capacitance	C_{oss}		-	78	-	
Reverse Transfer Capacitance	C_{rss}		-	60	-	
Switching characteristics						
Turn-on delay time	$t_{d(on)}$	V_{DD}=15V, I_D=3A, V_{GS}=10V, R_G=3Ω	-	4.5	-	ns
Turn-on rise time	t_r		-	2.6	-	
Turn-off delay time	$t_{d(off)}$		-	14.5	-	
Turn-off fall time	t_f		-	3.5	-	
Total Gate Charge	Qg	VDS=15V, ID=5.8A, VGS=10V	-	5.2	-	nC
Gate-Source Charge	Qgs		-	0.9	-	
Gate-Drain Charge	Qgd		-	1.3	-	
Source-Drain Diode characteristics						
Diode Forward voltage(3)	V_{DS}	V_{GS} =0V, I_S=5.8A	-	-	1.2	V
Diode Forward current(4)	I_S		-	-	5.8	A

Notes:

1. Repetitive Rating: pulse width limited by maximum junction temperature
2. Pulse Test: pulse width≤300μs, duty cycle≤2%
3. Surface Mounted on FR4 Board,t≤10 sec

Test Circuit

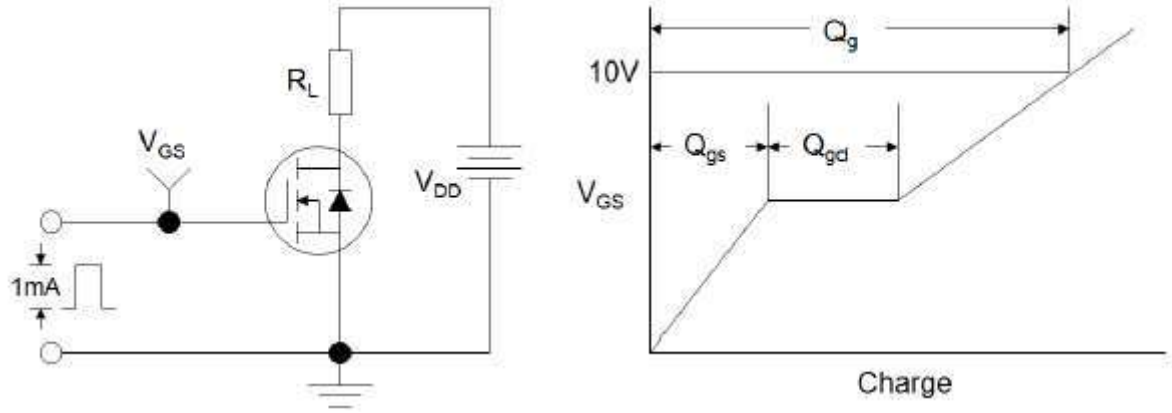


Figure1:Gate Charge Test Circuit & Waveform

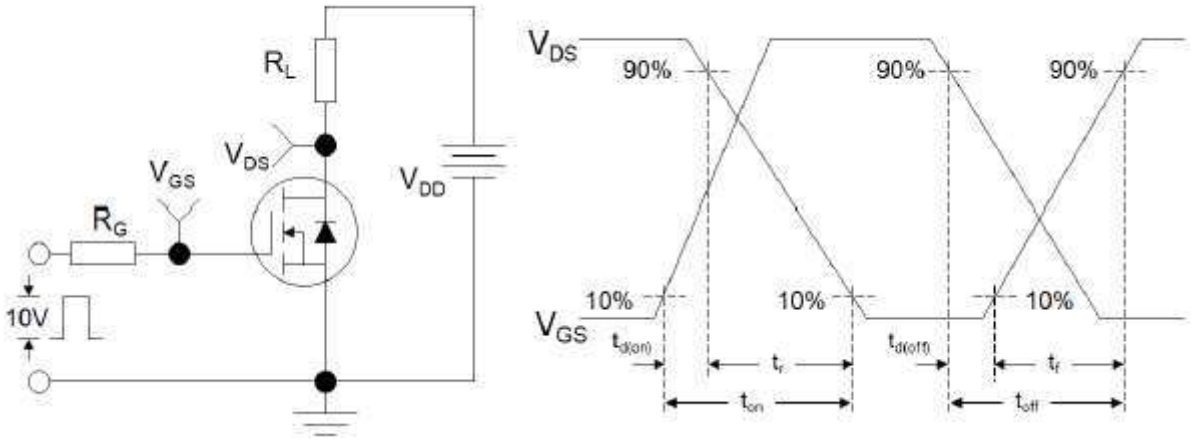


Figure 2: Resistive Switching Test Circuit & Waveforms

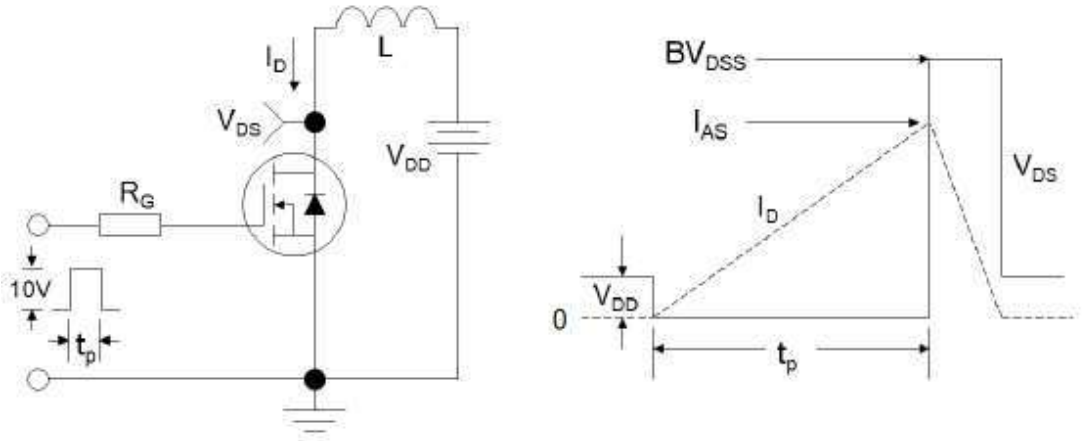


Figure 3:Unclamped Inductive Switching Test Circuit & Waveforms

Figure1: Output Characteristics

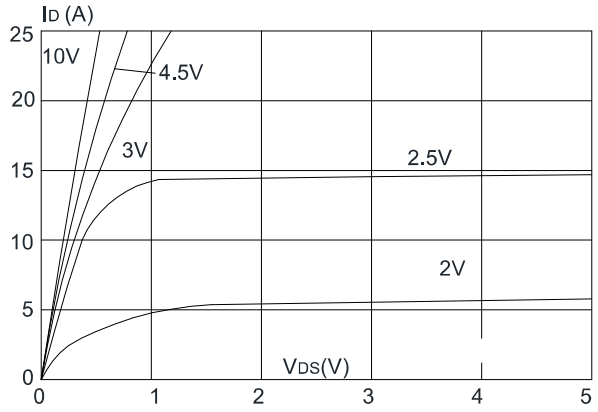


Figure 2: Typical Transfer Characteristics

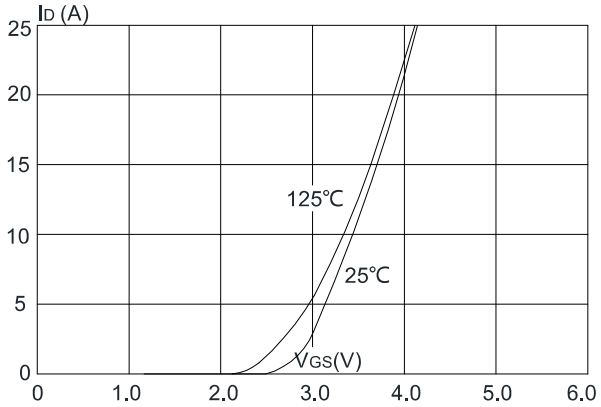


Figure 3: On-resistance vs. Drain Current

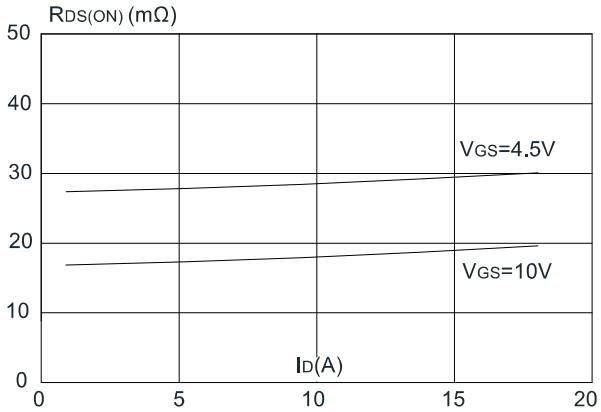


Figure 4: Body Diode Characteristics

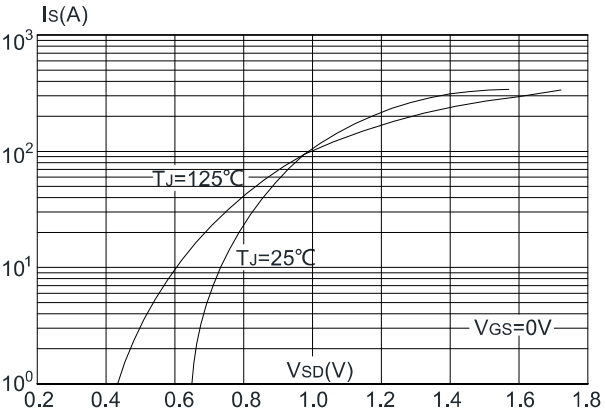


Figure 5: Gate Charge Characteristics

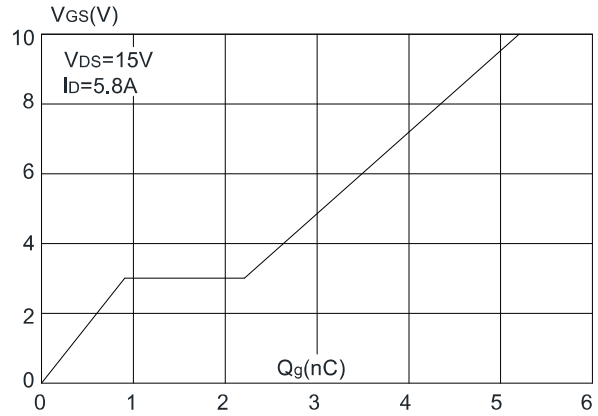


Figure 6: Capacitance Characteristics

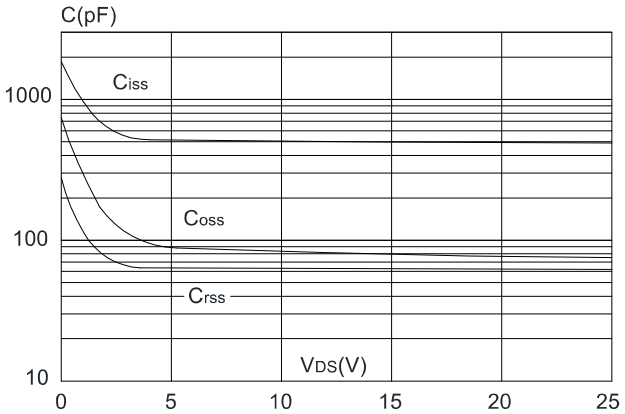


Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

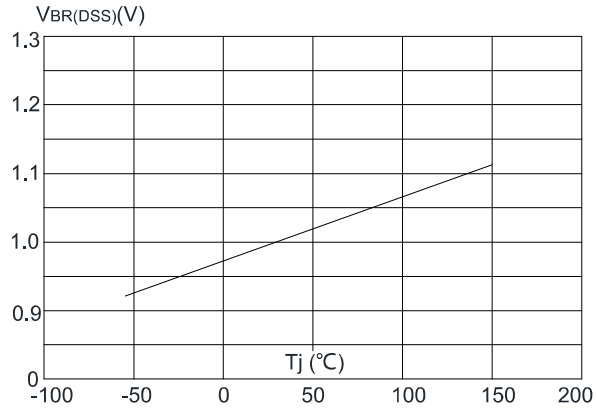


Figure 8: Normalized on Resistance vs. Junction Temperature

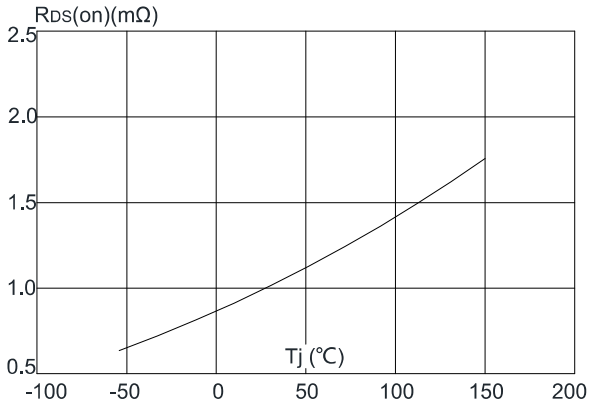


Figure 9: Maximum Safe Operating Area

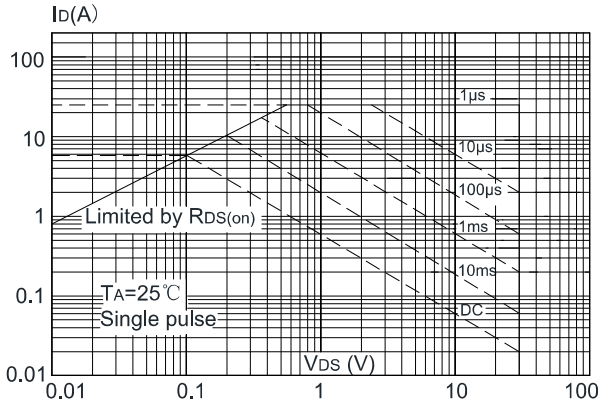


Figure 10: Maximum Continuous Drain Current vs. Ambient Temperature



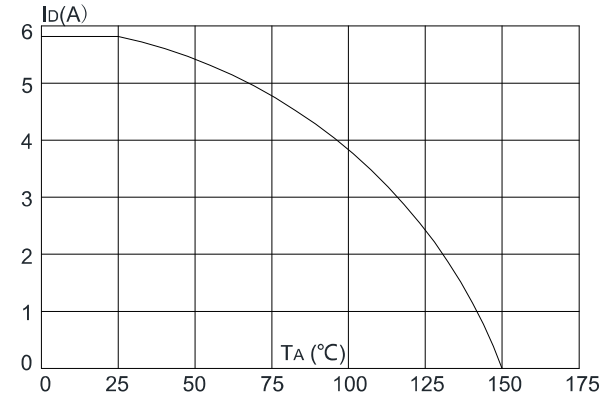


Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

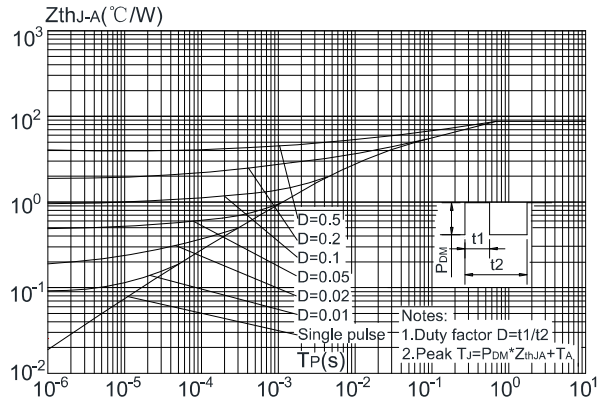


SOT-23 Package Information

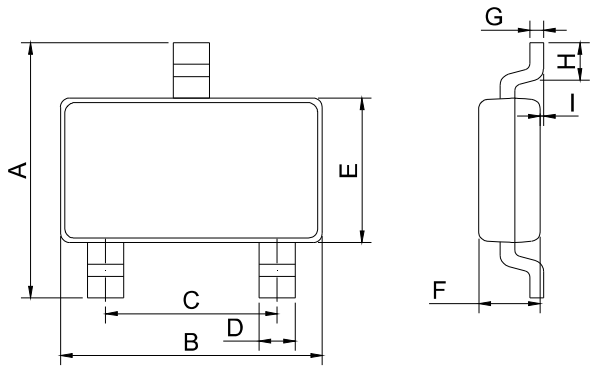


SOT-23

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.30	2.40	2.50	0.091	0.095	0.098
B	2.80	2.90	3.00	0.110	0.114	0.118
C	1.90 REF			0.075 REF		
D	0.35	0.40	0.45	0.014	0.016	0.018
E	1.20	1.30	1.40	0.047	0.051	0.055
F	0.90	1.00	1.10	0.035	0.039	0.043
G		0.10	0.15		0.004	0.006
H	0.20			0.008		
I	0		0.10	0		0.004

Package Information-SOT-23

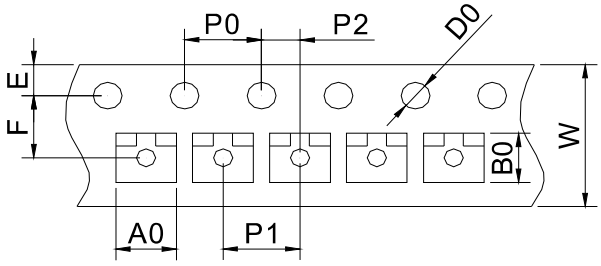

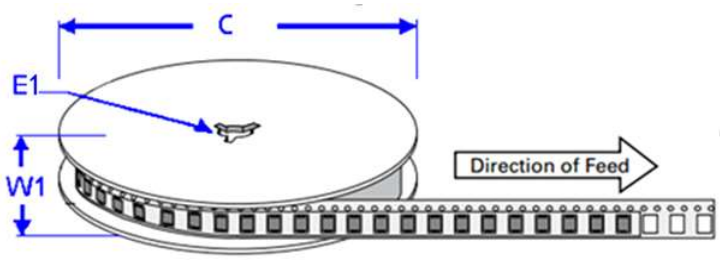

Ref.	Dimensions	
	Millimeters	Inches
A0	3.15 ± 0.3	0.124 ± 0.012
B0	2.77 ± 0.3	0.109 ± 0.012
C	178	7.0
D0	1.50±0.1	0.059 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3±0.3	0.524± 0.012
F	3.5 ± 0.2	0.138 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	4.00 ± 0.2	0.157 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	8.00 ± 0.2	0.315 ± 0.008
W1	11.5±1.0	0.453 ± 0.039