★ Super Low Gate Charge
★ 100% EAS Guaranteed
★ Green Device Available
★ Excellent CdV/dt effect decline
★ Advanced high cell density Trench technology

Product Summery


BVDSS	RDSON	ID
-60V	100mΩ	-10A

Description


The ZX 10P06 is the high cell density trenched P-ch MOSFETs, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.

The ZX 10P06 meet the RoHS and Green Product requirement, 100% EAS guaranteed with full function reliability approved.

TO252 Pin Configuration



pin assignment



Schematic diagram

Package Marking and Ordering Information

Product	Package	Marking	Packing	Min Unit Quantity
ZX 10P06	TO252	*	2500PCS/Reel	2500PCS

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-60	V
V_{GS}	Gate-Source Voltage	±20	V
I_D@T_C=25℃	Continuous Drain Current, V_{GS} @ -10V[1]	-12	A
I_D@T_C=100℃	Continuous Drain Current, V_{GS} @ -10V[1]	-7.8	A
I_D@T_A=25℃	Continuous Drain Current, V_{GS} @ -10V[1]	-3.5	A
I_D@T_A=70℃	Continuous Drain Current, V_{GS} @ -10V[1]	-2.8	A
I_{DM}	Pulsed Drain Current[2]	-25	A
EAS	Single Pulse Avalanche Energy[3]	20	mJ
I_{AS}	Avalanche Current	-20	A
P_D@T_C=25℃	Total Power Dissipation[4]	25	W
P_D@T_A=25℃	Total Power Dissipation[4]	2	W
T_{STG}	Storage Temperature Range	-55 to 150	℃
T_J	Operating Junction Temperature Range	-55 to 150	℃

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient [1]	---	62	℃/W
$R_{\theta JC}$	Thermal Resistance Junction-Case[1]	---	5	℃/W

Electrical Characteristics (T_J=25 ℃, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V , I_D=-250uA	-60	---	---	V
$\triangle BV_{DSS}/\triangle T_J$	BV_{DSS} Temperature Coefficient	Reference to 25℃ , I_D=-1mA	---	-0.049	---	V/℃
$R_{DS(ON)}$	Static Drain-Source On-Resistance[2]	V_{GS}=-10V , I_D=-8A	---	100	140	mΩ
		V_{GS}=-4.5V , I_D=-6A	---	115	190	
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS}=V_{DS} , I_D =-250uA	-1.0	---	-2.5	V
$\triangle V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	5.42	---	mV/℃
I_{DSS}	Drain-Source Leakage Current	V_{DS}=-48V , V_{GS}=0V , T_J=25℃	---	---	1	uA
		V_{DS}=-48V , V_{GS}=0V , T_J=150℃	---	---	5	
I_{GSS}	Gate-Source Leakage Current	V_{GS}=±20V , V_{DS}=0V	---	---	±100	nA
gfs	Forward Transconductance	V_{DS}=-5V , I_D=-5A	---	5.8	---	S
Q_g	Total Gate Charge (-4.5V)	V_{DS}=-20V , V_{GS} =-4.5V , I_D=-5A	---	5.85	---	nC
Q_{gs}	Gate-Source Charge		---	2.9	---	
Q_{gd}	Gate-Drain Charge		---	1.8	---	
$T_{d(on)}$	Turn-On Delay Time	V_{DD}=-12V , V_{GS}=-10V , R_G=3.3Ω, I_D=-5A	---	10	---	ns
T_r	Rise Time		---	17	---	
$T_{d(off)}$	Turn-Off Delay Time		---	22	---	
T_f	Fall Time		---	21	---	
C_{iss}	Input Capacitance	V_{DS}=-15V , V_{GS}=0V , F=1MHz	---	715	---	pF
C_{oss}	Output Capacitance		---	51	---	
C_{rss}	Reverse Transfer Capacitance		---	34	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current[1,5]	V_G=V_D=0V , Force Current	---	---	-9.5	A
I_{SM}	Pulsed Source Current[2,5]		---	---	-24	A
V_{SD}	Diode Forward Voltage[2]	V_{GS}=0V , I_S=-1A , T_J=25℃	---	---	-1.2	V
t_{rr}	Reverse Recovery Time	I_F=-8A , dI/dt=100A/μs , T_J=25℃	---	10.2	---	nS
Q_{rr}	Reverse Recovery Charge		---	5.4	---	nC

Note :
1. The data tested by surface mounted on a 1 inch^2 FR-4 board with 2OZ copper.
2. The data tested by pulsed , pulse width ≦ 300us , duty cycle ≦ 2%
3. The EAS data shows Max. rating. The test condition is V_{DD}=-25V,V_{GS}=-10V,L=0.1mH,I_{AS}=-15A
4. The power dissipation is limited by 150℃ junction temperature
5. The data is theoretically the same as I_D and I_{DM}, in real applications, should be limited by total power dissipation.

P-Channel Typical Characteristics

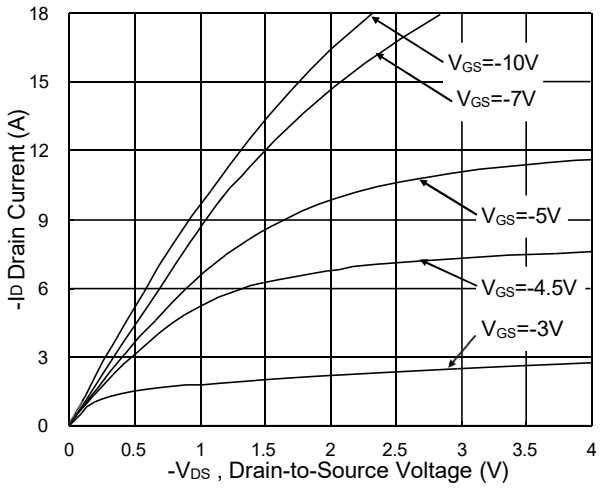


Fig.1 Typical Output Characteristics

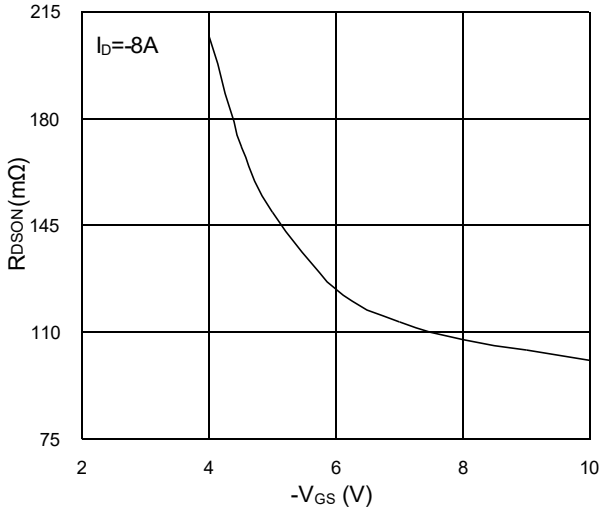


Fig.2 On-Resistance vs. G-S Voltage

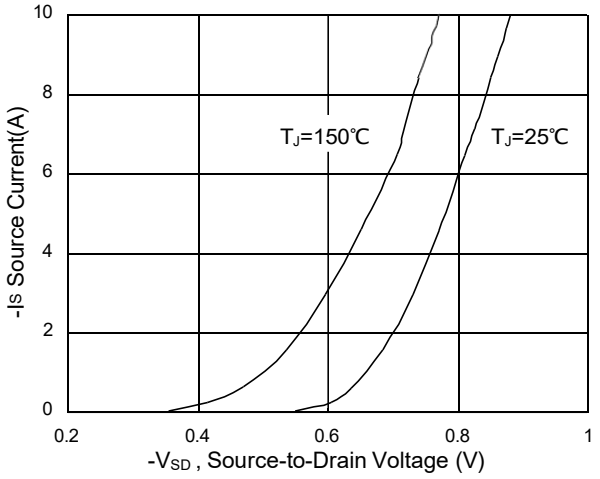


Fig.3 Forward Characteristics Of Reverse

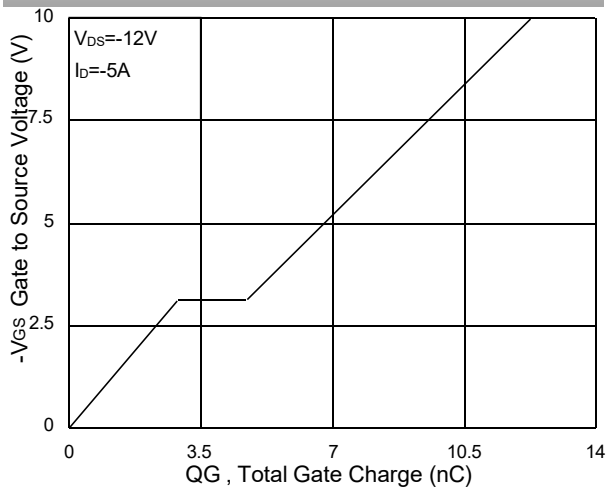


Fig.4 Gate-Charge Characteristics

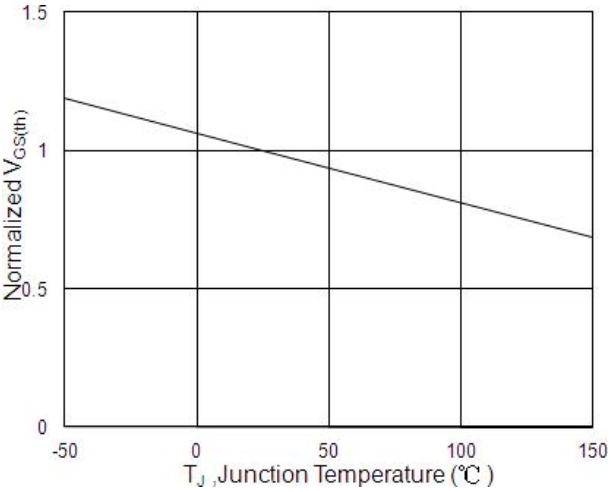


Fig.5 Normalized $V_{GS(th)}$ vs. T_J

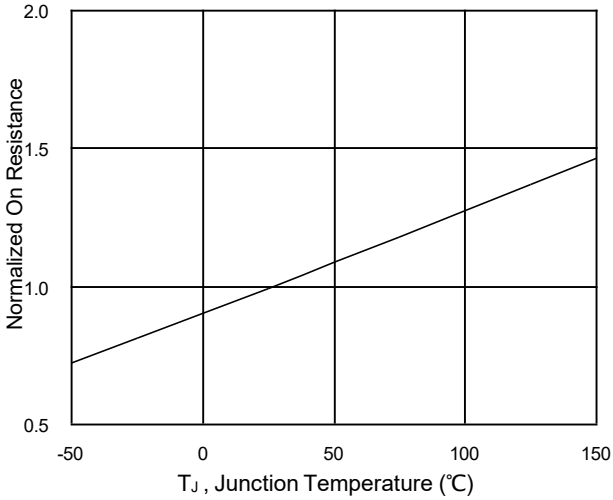


Fig.6 Normalized R_{DSON} vs. T_J

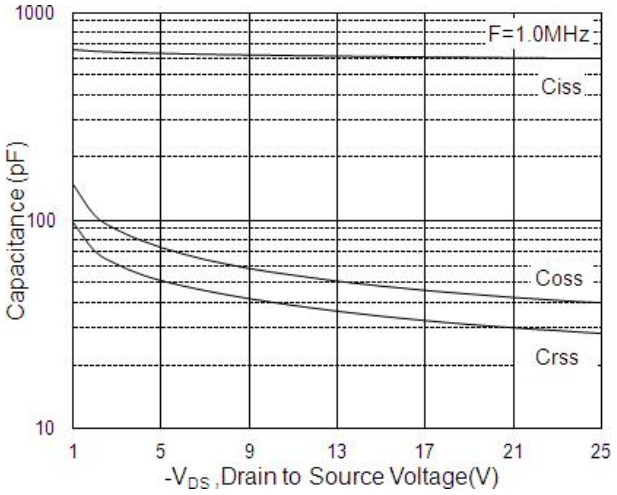


Fig.7 Capacitance

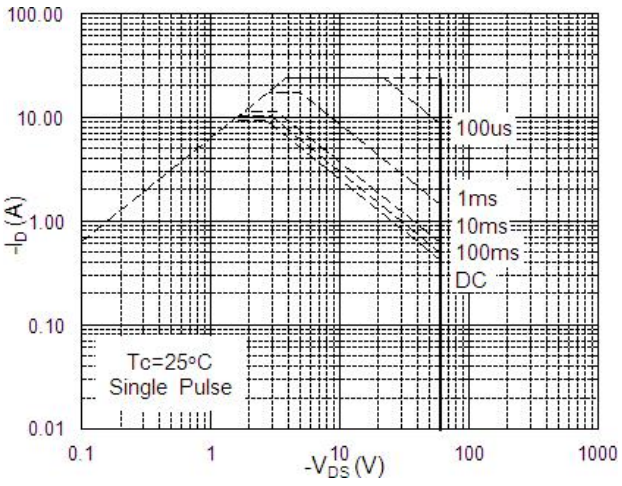


Fig.8 Safe Operating Area

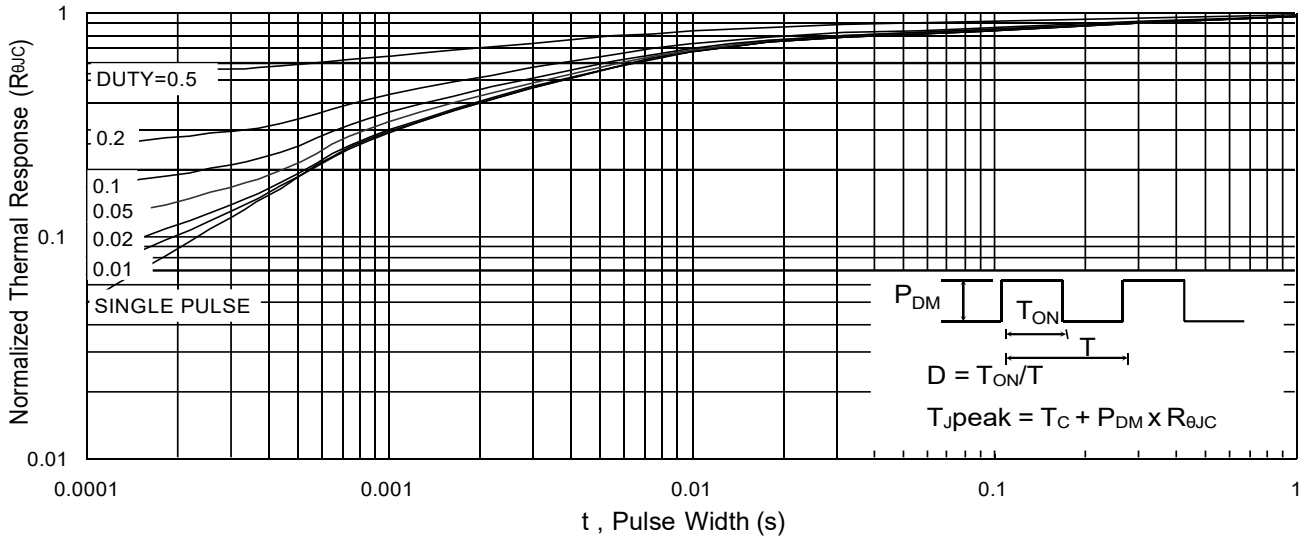


Fig.9 Normalized Maximum Transient Thermal Impedance

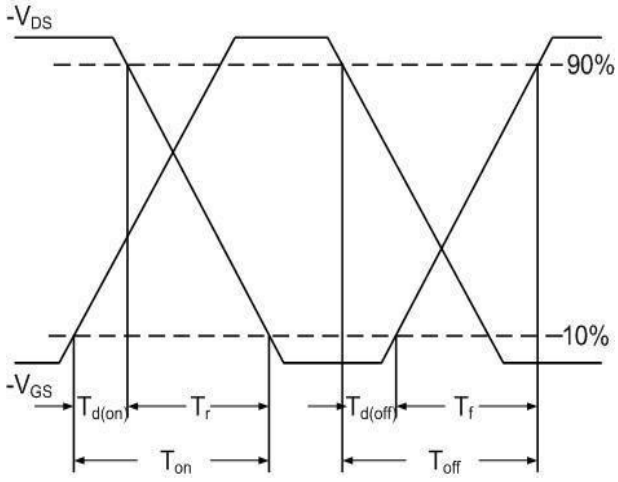


Fig.10 Switching Time Waveform


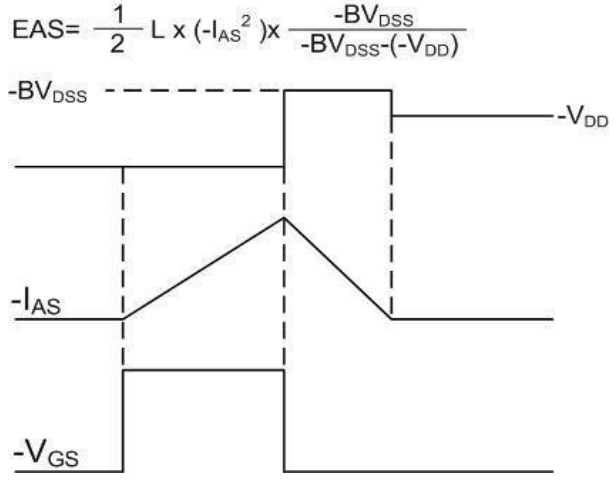


Fig.11 Unclamped Inductive Switching Waveform


Package Mechanical Data TO 252 4R

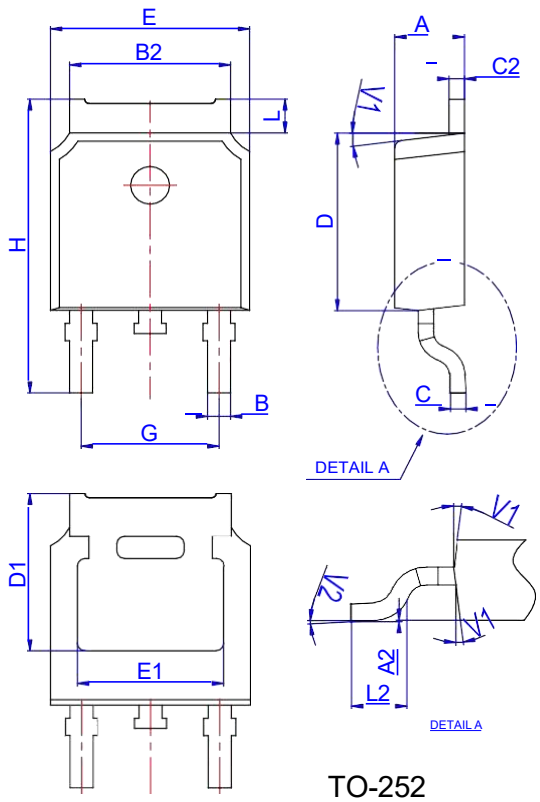

TO-252

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.10		2.50	0.083		0.098
A2	0		0.10	0		0.004
B	0.66		0.86	0.026		0.034
B2	5.18		5.48	0.202		0.216
C	0.40		0.60	0.016		0.024
C2	0.44		0.58	0.017		0.023
D	5.90		6.30	0.232		0.248
D1	5.30REF			0.209REF		
E	6.40		6.80	0.252		0.268
E1	4.63			0.182		
G	4.47		4.67	0.176		0.184
H	9.50		10.70	0.374		0.421
L	1.09		1.21	0.043		0.048
L2	1.35		1.65	0.053		0.065
V1		7°			7°	
V2	0°		6°	0°		6°

Reel Spectification-TO-252-4R

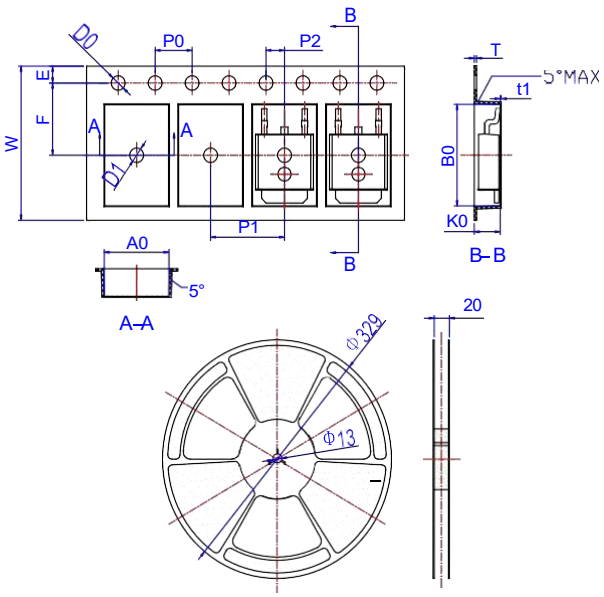

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
W	15.90	16.00	16.10	0.626	0.630	0.634
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
D0	1.40	1.50	1.60	0.055	0.059	0.063
D1	1.40	1.50	1.60	0.055	0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
A0	6.85	6.90	7.00	0.270	0.271	0.276
B0	10.45	10.50	10.60	0.411	0.413	0.417
K0	2.68	2.78	2.88	0.105	0.109	0.113
T	0.24		0.27	0.009		0.011
t1	0.10			0.004		
10P0	39.80	40.00	40.20	1.567	1.575	1.583