- ★ Super Low Gate Charge
- ★ 100% EAS Guaranteed
- ★ Green Device Available
- ★ Excellent CdV/dt effect decline
- ★ Advanced high cell density Trench technology

Product Summary


BVDSS	RDSON	ID
-30V	3.7mΩ	-90 A


Description

The ZX30035X is the high cell density trenched P-ch MOSFETs, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.

The ZX30035X meet the RoHS and Green Product requirement, 100% EAS guaranteed with full function reliability approved.

PDFN5060-8L Pin Configuration





Package Marking and Ordering Information

Product	Package	Marking	Packing	Min Unit Quantity
ZX30035X	PDFN5*6	*	5000PCS/Reel	5000PCS

Absolute Maximum Ratings (T_A= 25°C, unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain-Source Voltage		V_{DS}	-30	V
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current	T_C=25°C	I_D	-90	A
	T_C=100°C		-57	
Pulsed Drain Current[1]		I_{DM}	-360	A
Single Pulse Avalanche Energy[2]		EAS	125	mJ
Total Power Dissipation	T_C=25°C	P_D	60	W
Operating Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150	°C

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance from Junction-to-Ambient[3]	$R_{\theta JA}$	55	°C/W
Thermal Resistance from Junction-to-Case	$R_{\theta JC}$	2.08	°C/W

Electrical Characteristics (T_J = 25°C, unless otherwise noted)

Parameter		Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics							
Drain-Source Breakdown Voltage		$V_{(BR)DSS}$	V_{GS} = 0V, I_D = -250μA	-30	-	-	V
Gate-body Leakage current		I_{GSS}	V_{DS} = 0V, V_{GS} = ±20V	-	-	±100	nA
Zero Gate Voltage Drain Current	T_J=25°C	I_{DSS}	V_{DS} = -30V, V_{GS} = 0V	-	-	-1	μA
	T_J=100°C			-	-	-100	
Gate-Threshold Voltage		$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = -250μA	-1.0	-1.6	-2.5	V
Drain-Source On-Resistance[4]		$R_{DS(on)}$	V_{GS} = -10V, I_D = -20A	-	3.7	4.0	mΩ
			V_{GS} = -4.5V, I_D = -10A	-	6.1	7.0	
Forward Transconductance[4]		g_{fs}	V_{DS} = -10V, I_D = -30A	-	90	-	S
Dynamic Characteristics[5]							
Input Capacitance		C_{iss}	V_{DS} = -15V, V_{GS} =0V, f =1MHz	-	5070	-	pF
Output Capacitance		C_{oss}		-	695	-	
Reverse Transfer Capacitance		C_{rss}		-	580	-	
Gate resistance		R_g	f =1MHz	-	4	-	Ω
Switching Characteristics[5]							
Total Gate Charge		Q_g	V_{GS} = -10V,V_{DS} = -15V, I_D= -30A	-	146	-	nC
Gate-Source Charge		Q_{gs}		-	21.5	-	
Gate-Drain Charge		Q_{gd}		-	39	-	
Turn-On Delay Time		$t_{d(on)}$	V_{GS} = -10V, V_{DD} = -15V, R_G = 3Ω, I_D= -30A	-	23	-	ns
Rise Time		t_r		-	15	-	
Turn-Off Delay Time		$t_{d(off)}$		-	129	-	
Fall Time		t_f		-	28	-	
Drain-Source Body Diode Characteristics							
Diode Forward Voltage[4]		V_{SD}	I_S = -30A, V_{GS} = 0V	-	-	-1.2	V
Continuous Source Current	T_C=25°C	I_S	-	-	-	-90	A

Note :

1. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=150°C
2. The EAS data shows Max. rating . The test condition is V_{DD}= -25V, V_{GS}= -10V, L= 0.1mH, I_{AS}= -50A
3. The data tested by surface mounted on a 1 inch2 FR-4 board with 2OZ copper, The value in any given application depends on the user's specific board design.

Typical Characteristics

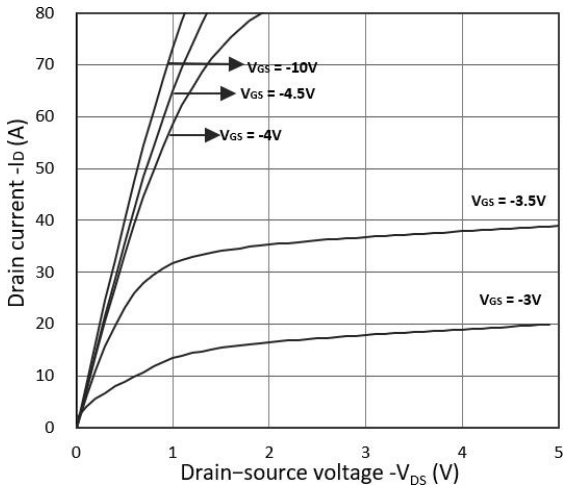


Figure 1. Output Characteristics

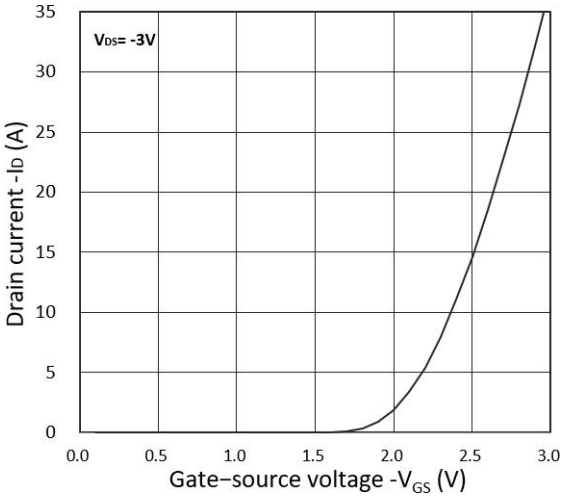


Figure 2. Transfer Characteristics

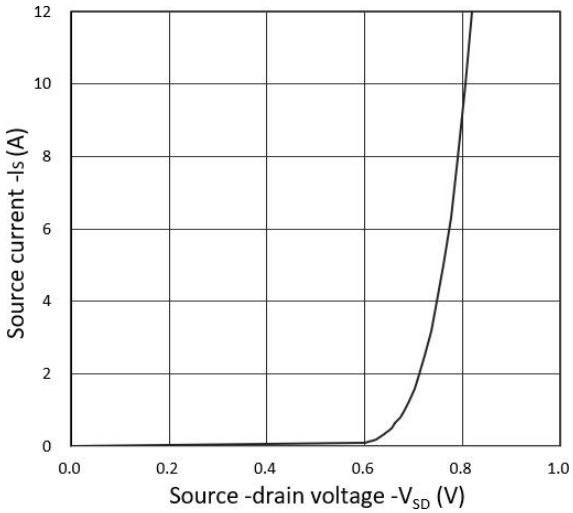


Figure 3. Forward Characteristics of Reverse

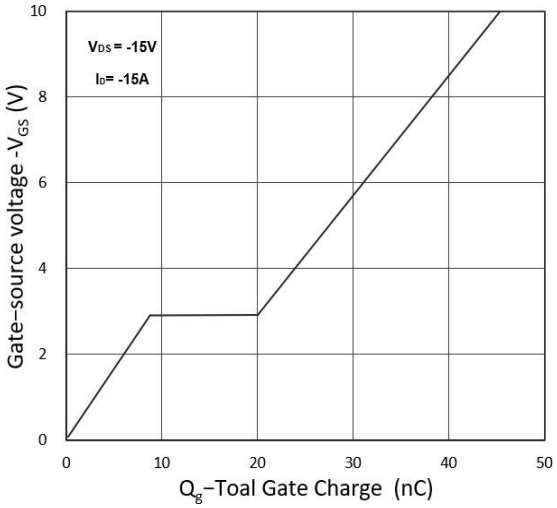


Figure 4. Gate Charge Characteristics

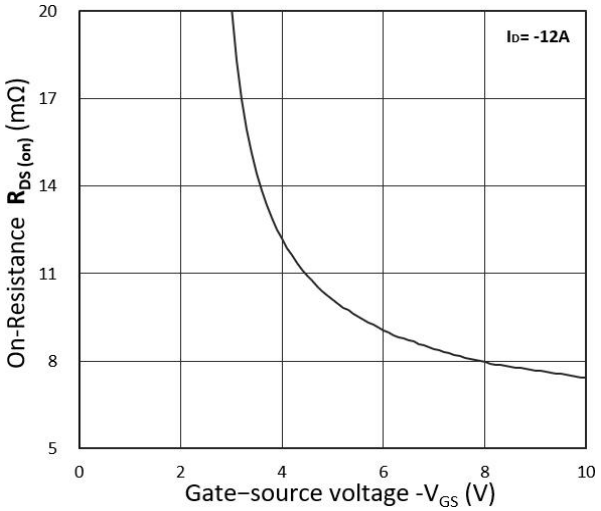


Figure 5. $R_{DS(on)}$ vs. V_{GS}

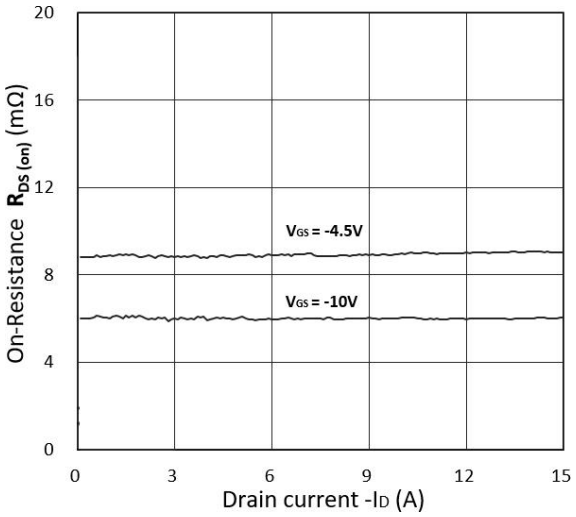


Figure 6. $R_{DS(on)}$ vs. I_D

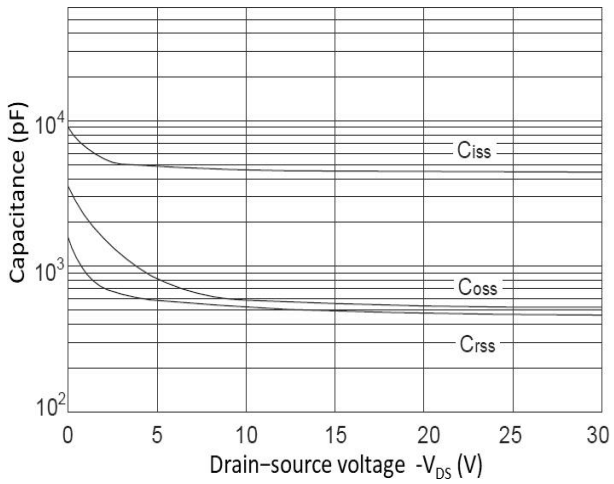


Figure 7. Capacitance Characteristics

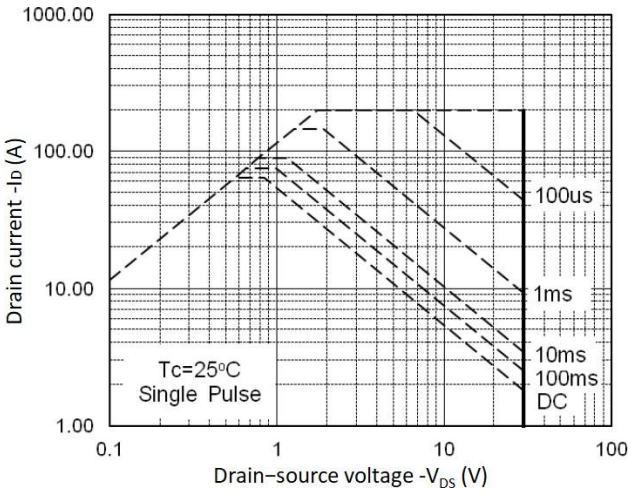


Figure 8. Safe Operating Area

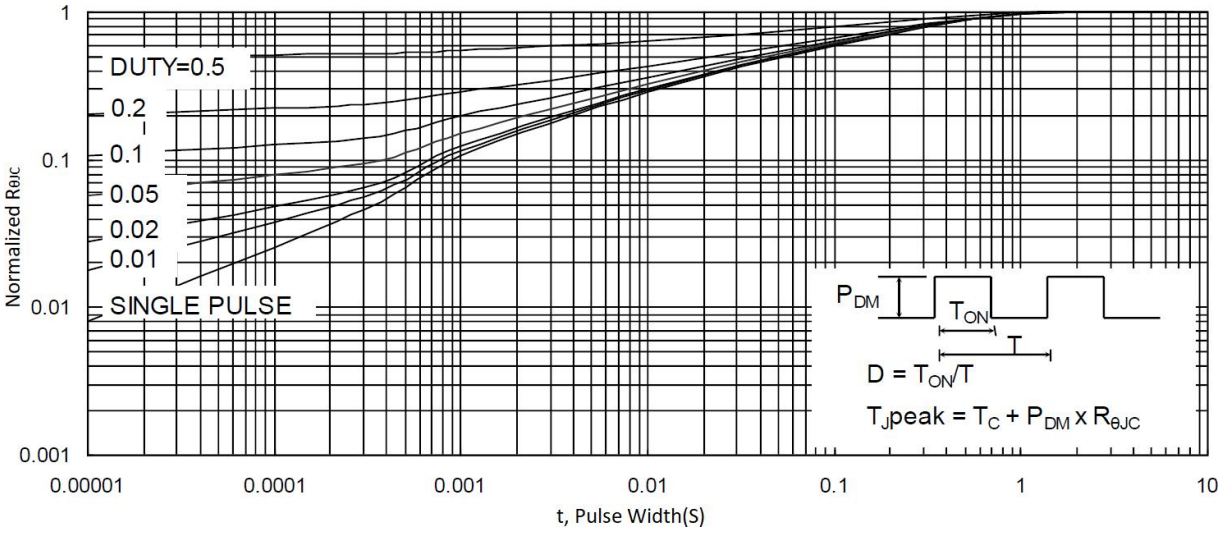


Figure 9. Normalized Maximum Transient Thermal Impedance

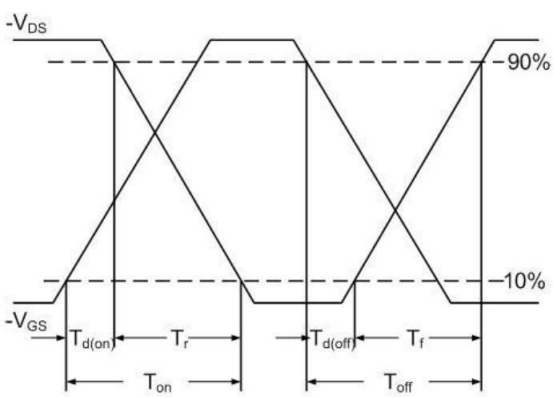


Figure 10. Switching Time Waveform

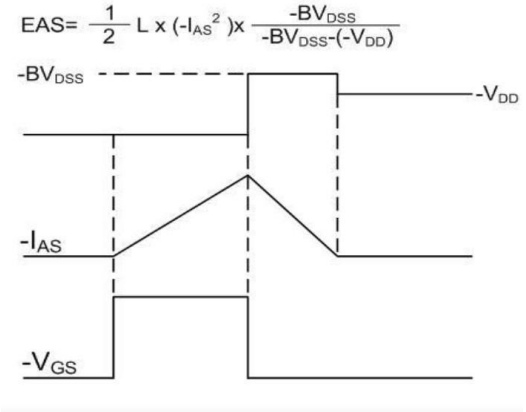


Figure 11. Unclamped Inductive Switching Waveform

Test Circuit


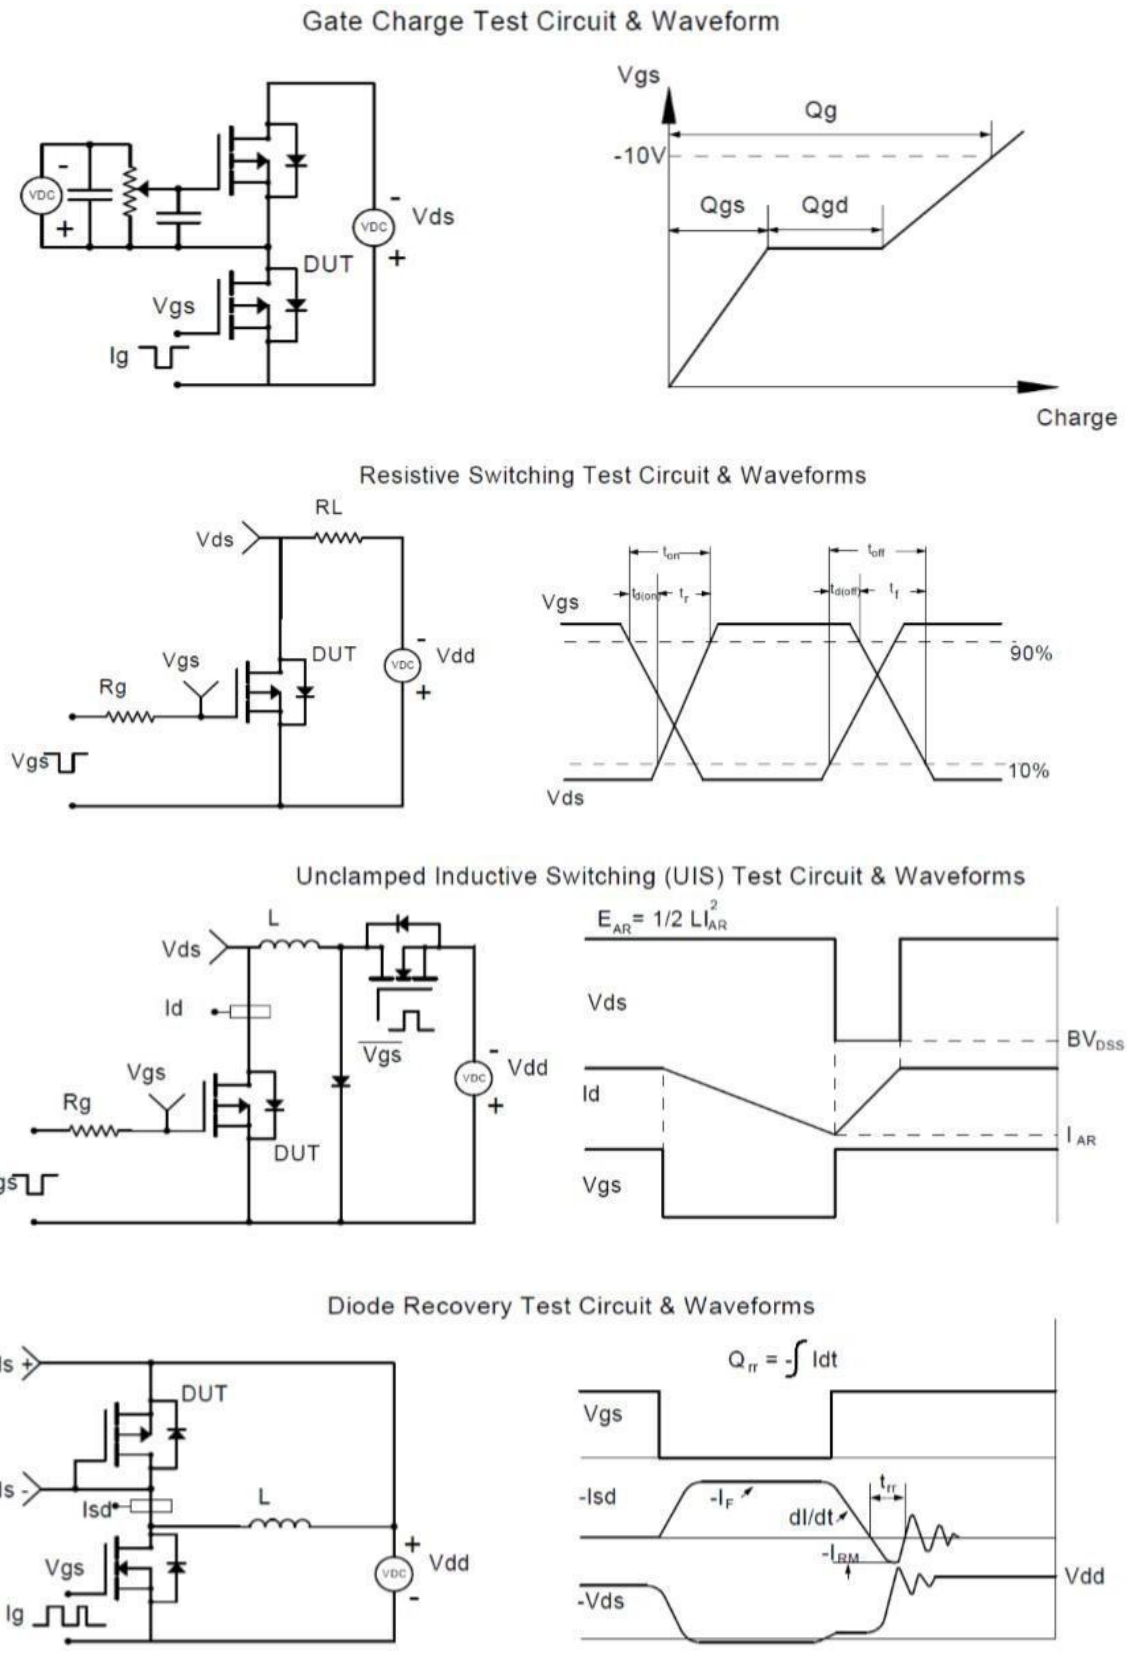


Figure C. Unclamped Inductive Switching Circuit & Waveforms

Package Mechanical Data-PDFN5060-8L-Single

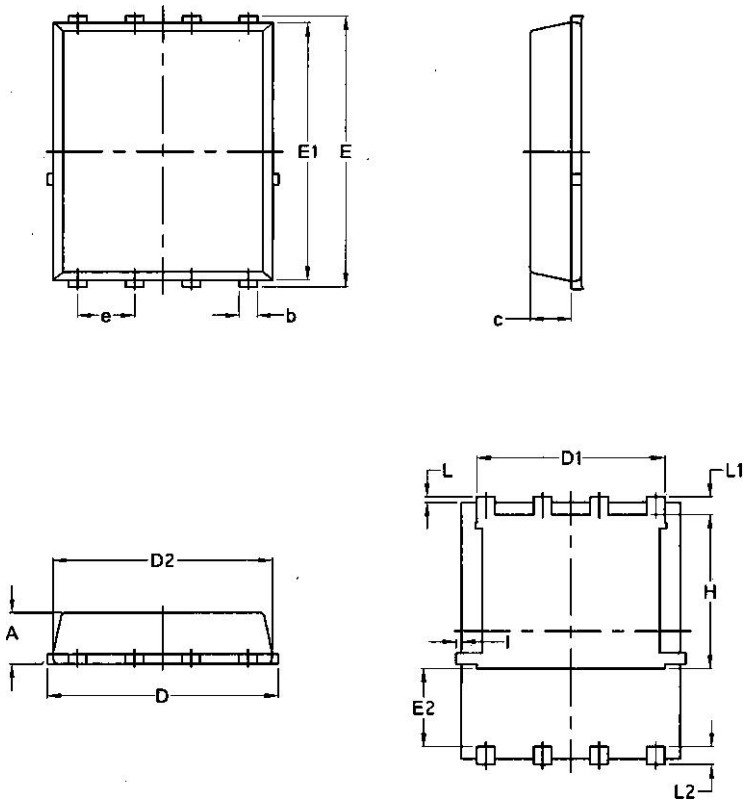

Symbol	Common			
	mm		Inch	
	Mim	Max	Min	Max
A	1.03	1.17	0.0406	0.0461
b	0.34	0.48	0.0134	0.0189
c	0.824	0.0970	0.0324	0.082
D	4.80	5.40	0.1890	0.2126
D1	4.11	4.31	0.1618	0.1697
D2	4.80	5.00	0.1890	0.1969
E	5.95	6.15	0.2343	0.2421
E1	5.65	5.85	0.2224	0.2303
E2	1.60	/	0.0630	/
e	1.27 BSC		0.05 BSC	
L	0.05	0.25	0.0020	0.0098
L1	0.38	0.50	0.0150	0.0197
L2	0.38	0.50	0.0150	0.0197
H	3.30	3.50	0.1299	0.1378
I	/	0.18	/	0.0070