- ★ 100% EAS Guaranteed
- ★ Green Device Available
- ★ Super Low Gate Charge
- ★ Excellent CdV/dt effect decline
- ★ Advanced high cell density Trench technology

Product Summary


BVDSS	RDSON	ID
-30V	13mΩ	-20A

Description


The ZX 30P20 is the high cell density trenched N-ch MOSFETs, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.

The ZX 30P20 meet the RoHS and Green Product requirement 100% EAS guaranteed with full function reliability approved.

DFN2X2 Pin Configuration



pin assignment



Schematic diagram

Package Marking and Ordering Information

Product	Package	Marking	Packing	Min Unit Quantity
ZX 30P20	DFN2*2	*	5000PCS/Reel	5000PCS

Absolute Maximum Ratings

Symbol	Parameter	Rating		Units
		10s	Steady State	
V_{DS}	Drain-Source Voltage	-30		V
V_{GS}	Gate-Source Voltage	±20		V
I_D@T_C=25℃	Continuous Drain Current, V_{GS} @ -10V[1]	-20		A
I_D@T_C=100℃	Continuous Drain Current, V_{GS} @ -10V[1]	-16		A
I_{DM}	Pulsed Drain Current[2]	-100		A
EAS	Single Pulse Avalanche Energy[3]	45		mJ
I_{AS}	Avalanche Current	-20		A
P_D@T_C=25℃	Total Power Dissipation[4]	9.0		W
P_D@T_A=25℃	Total Power Dissipation[4]	4.2		W
T_{STG}	Storage Temperature Range	-55 to 150		℃
T_J	Operating Junction Temperature Range	-55 to 150		℃

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient [1]	---	68	℃/W

Electrical Characteristics (T_J=25℃ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristic						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	V_{GS}=0V, I_D= -250μA	-30	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}= -30V, V_{GS}=0V,	-	-	-1	μA
I_{GSS}	Gate to Body Leakage Current	V_{DS}=0V, V_{GS}= ±20V	-	-	±100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D= -250μA	-1.0	-1.6	-2.5	V
$R_{DS(on)}$	Static Drain-Source on-Resistance Note3	V_{GS}= -10V, I_D= -10A	-	13	16	mΩ
		V_{GS}= -4.5V, I_D= -5A	-	18	27	
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{DS}= -15V, V_{GS}=0V, f=1.0MHz	-	1330	-	pF
C_{oss}	Output Capacitance		-	183	-	pF
C_{rss}	Reverse Transfer Capacitance		-	156	-	pF
Q_g	Total Gate Charge	V_{DS}= -15V, I_D= -5A, V_{GS}= -10V	-	22	-	nC
Q_{gs}	Gate-Source Charge		-	1.0	-	nC
Q_{gd}	Gate-Drain(“Miller”) Charge		-	1.8	-	nC
Switching Characteristics						
$t_{d(on)}$	Turn-on Delay Time	V_{DD}= -15V, I_D= -10A, V_{GS}=-10V, R_{GEN}=2.5Ω	-	9	-	ns
t_r	Turn-on Rise Time		-	13	-	ns
$t_{d(off)}$	Turn-off Delay Time		-	48	-	ns
t_f	Turn-off Fall Time		-	20	-	ns
Drain-Source Diode Characteristics and Maximum Ratings						
I_S	Maximum Continuous Drain to Source Diode Forward Current		-	-	-20	A
I_{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	-80	A
V_{SD}	Drain to Source Diode Forward Voltage	V_{GS}=0V, I_S= -15A	-	-0.8	-1.2	V
trr	Reverse Recovery Time	T_J=25℃, V_{DD}= -24V,I_F=-2.8A, dI/dt=-100A/μs	-	64	-	ns
Qrr	Reverse Recovery Charge		-	25	-	nC

Notes:1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

2. EAS condition: T_J=25℃, V_{GS}=10V, R_G=25Ω, L=0.5mH, I_{AS}=-12.7A

3. Pulse Test: Pulse Width≤300μs, Duty Cycle≤0.5%

Typical Performance Characteristics

Figure1: Output Characteristics

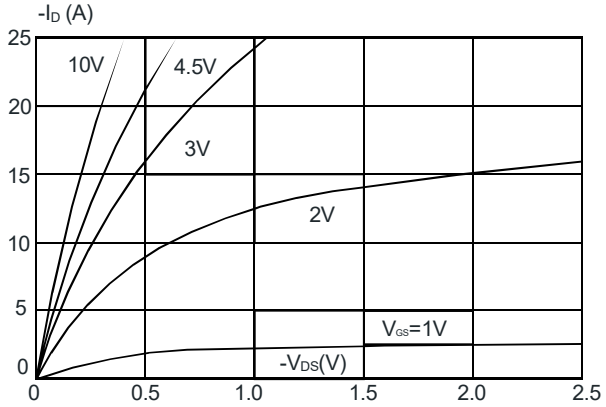


Figure 2: Typical Transfer Characteristics

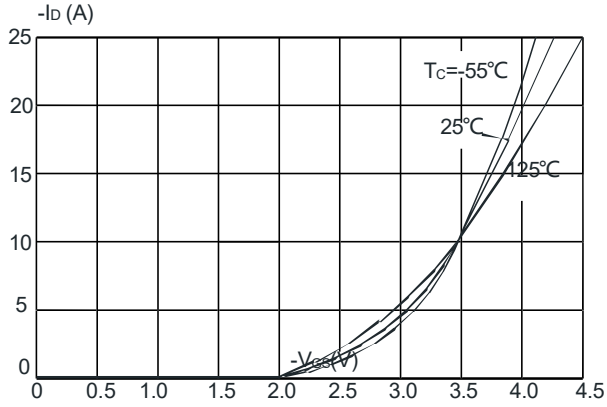


Figure 3: On-resistance vs. Drain Current

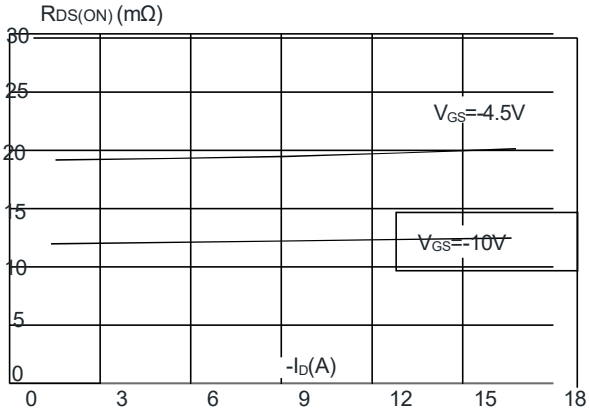


Figure 4 : Body Diode Characteristics

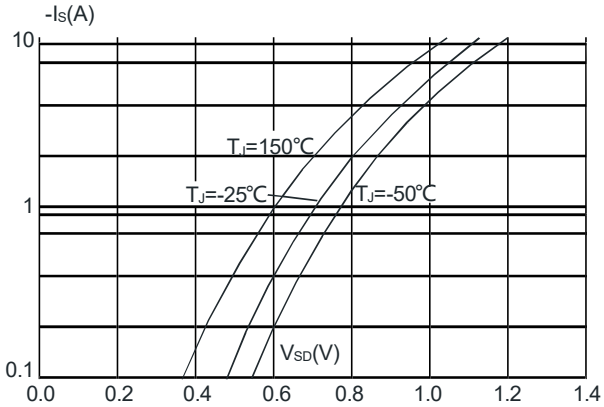


Figure 5: Gate Charge Characteristics

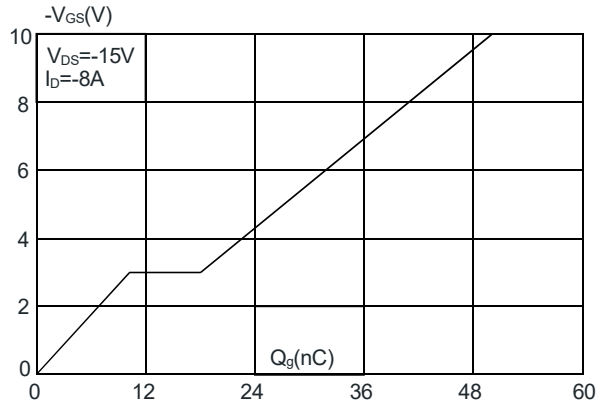


Figure 6: Capacitance Characteristics

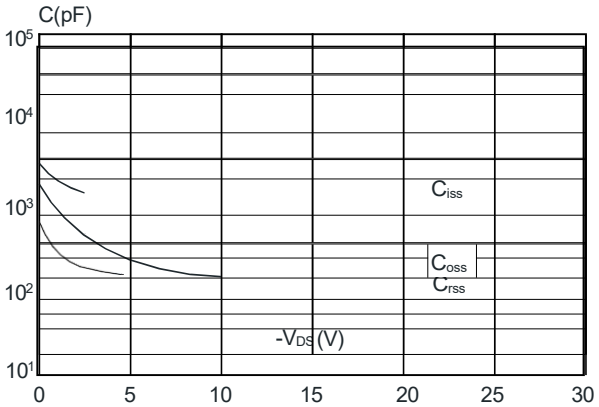


Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

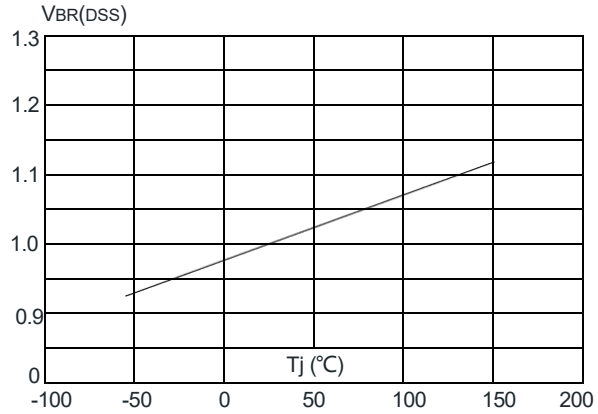


Figure 8: Normalized on Resistance vs. Junction Temperature

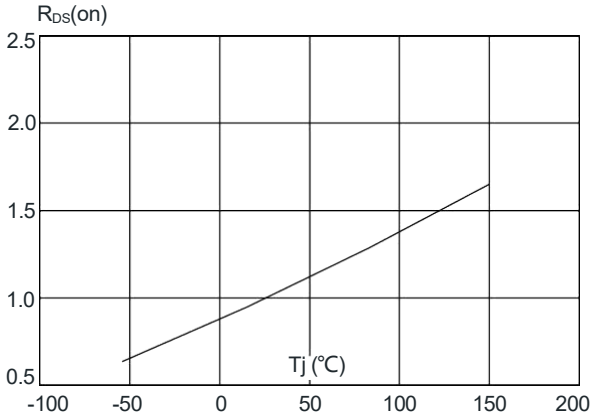


Figure 9: Maximum Safe Operating Area

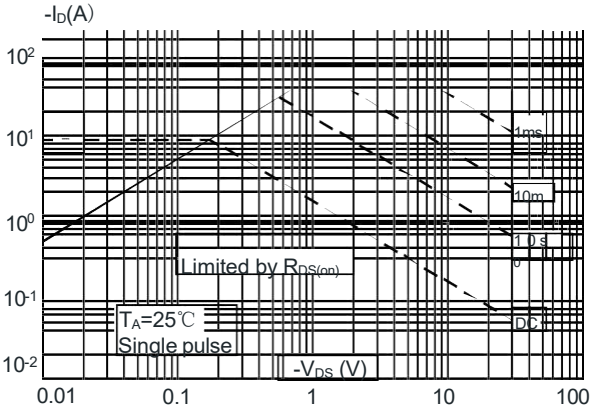


Figure 10: Maximum Continuous Drain Current vs. Ambient Temperature


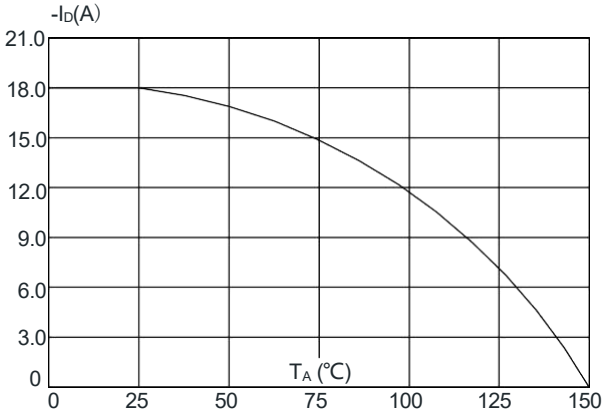


Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

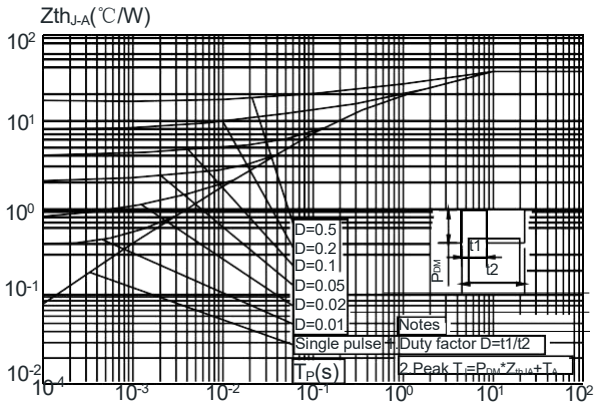

Test Circuit

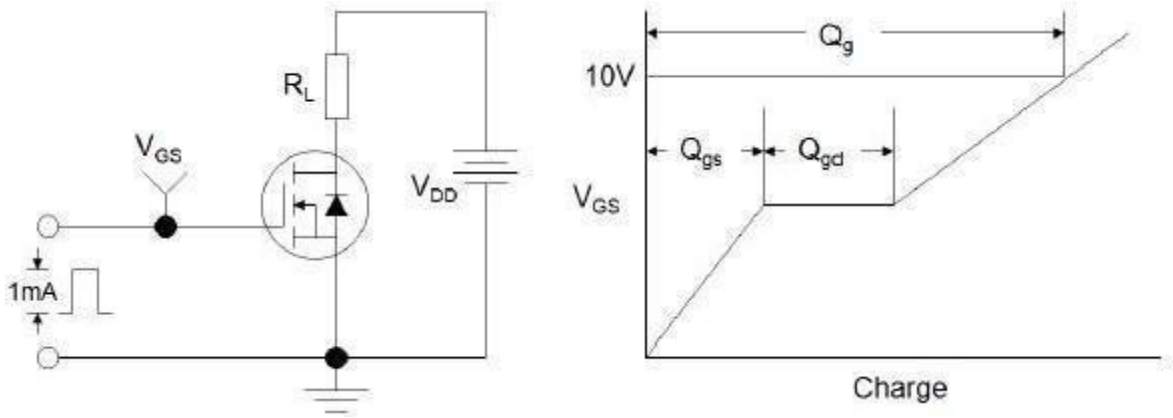


Figure1:Gate Charge Test Circuit & Waveform

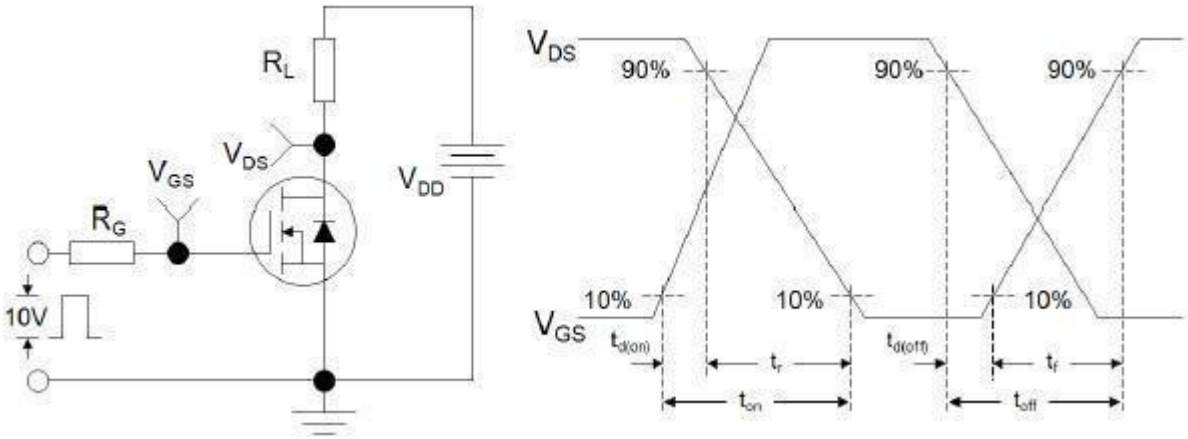


Figure 2: Resistive Switching Test Circuit & Waveforms


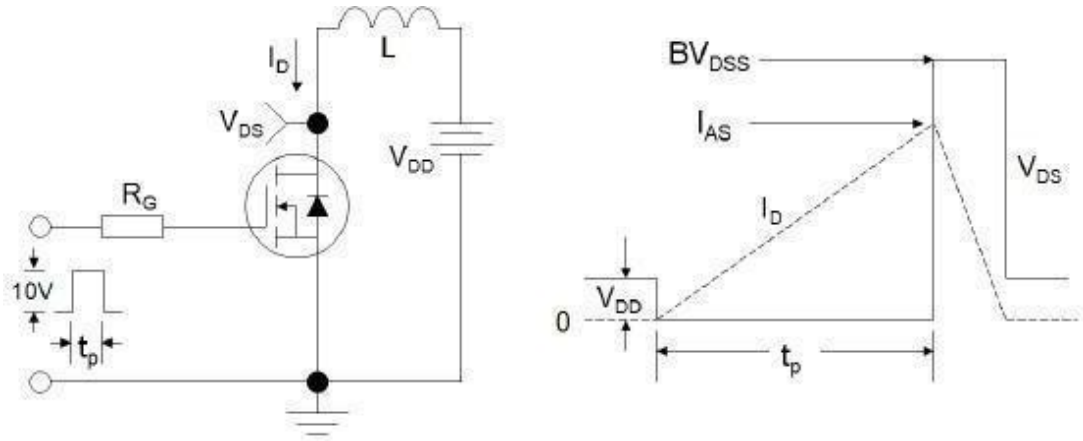


Figure 3:Unclamped Inductive Switching Test Circuit & Waveforms

DFN2X2 Package Information

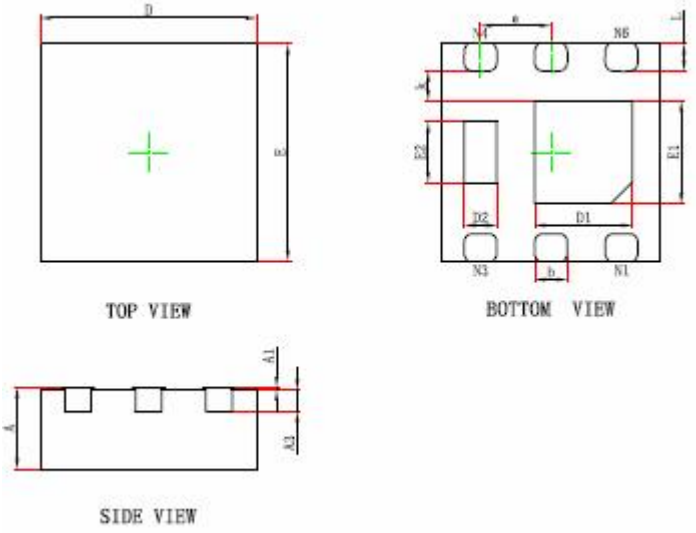

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	1.924	2.076	0.076	0.082
E	1.924	2.076	0.076	0.082
D1	0.800	1.000	0.031	0.039
E1	0.850	1.050	0.033	0.041
D2	0.200	0.400	0.008	0.016
E2	0.460	0.660	0.018	0.026
k	0.200MIN.		0.008MIN.	
b	0.250	0.350	0.010	0.014
e	0.650TYP.		0.026TYP.	
L	0.174	0.326	0.007	0.013