★ Green Device Available
★ Super Low Gate Charge
★ Excellent CdV/dt effect decline
★ Advanced high cell density Trench technology

Product Summary

BVDSS	RDSON	ID
60V	40mΩ	5 A


Description

The ZX 6005 is the high cell density trenched N-ch MOSFETs, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.
The ZX 6005 meet the RoHS and Green Product

SOT-23-3L Pin Configuration



pin assignment



Schematic diagram

Package Marking and Ordering Information

Product	Package	Marking	Packing	Min Unit Quantity
ZX 6005	SOT23-3L	*	3000PCS/Reel	3000PCS

Absolute Maximum Ratings (T_C=25℃ unless otherwise specified)

Symbol	Parameter		Max.	Units
V_{DSS}	Drain-Source Voltage		60	V
V_{GSS}	Gate-Source Voltage		±20	V
I_D	Continuous Drain Current	T_C = 25℃	5	A
		T_C = 100℃	3.8	A
I_{DM}	Pulsed Drain Current note1		30	A
EAS	Single Pulsed Avalanche Energy note2			mJ
P_D	Power Dissipation	T_C = 25℃	3	W
$R_{\theta JC}$	Thermal Resistance, Junction to Case		73	℃/W
T_J, T_{STG}	Operating and Storage Temperature Range		-55 to +175	℃

Electrical Characteristics (T_J=25℃ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristic						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	V_{GS}=0V, I_D=250μA	60	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=60V, V_{GS}=0V,	-	-	1.0	μA
I_{GSS}	Gate to Body Leakage Current	V_{DS}=0V, V_{GS}=±20V	-	-	±100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=250μA	1	1.6	2.5	V
$R_{DS(on)}$	Static Drain-Source on-Resistance note3	V_{GS}=10V, I_D=15A	-	40	49	mΩ
		V_{GS}=4.5V, I_D=10A	-	45	63	
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{DS}=25V, V_{GS}=0V, f=1.0MHz	-	825	-	pF
C_{oss}	Output Capacitance		-	49	-	pF
C_{rss}	Reverse Transfer Capacitance		-	41	-	pF
Q_g	Total Gate Charge	V_{DS}=30V, I_D=4.5A, V_{GS}=10V	-	14	-	nC
Q_{gs}	Gate-Source Charge		-	2.9	-	nC
Q_{gd}	Gate-Drain(“Miller”) Charge		-	5.2	-	nC
Switching Characteristics						
$t_{d(on)}$	Turn-on Delay Time	V_{DS}=30V,I_D=2A, R_L=6.7Ω,R_G=3Ω, V_{GS}=10V	-	5	-	ns
t_r	Turn-on Rise Time		-	2.6	-	ns
$t_{d(off)}$	Turn-off Delay Time		-	16.1	-	ns
t_f	Turn-off Fall Time		-	2.3	-	ns
Drain-Source Diode Characteristics and Maximum Ratings						
I_S	Maximum Continuous Drain to Source Diode Forward Current		-	-	5	A
I_{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	30	A
V_{SD}	Drain to Source Diode Forward Voltage	V_{GS}=0V, I_S=15A	-	-	1.2	V
trr	Body Diode Reverse Recovery Time	T_J=25℃,I_F=15A, dI/dt=100A/μs	-	35	-	ns
Qrr	Body Diode Reverse Recovery Charge		-	53	-	nC

Notes:1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

2. EAS condition : T_J=25℃,V_{DD}=30V,V_G=10V,L=0.5mH,Rg=25Ω,I_{AS}=6.1A

3. Pulse Test: Pulse Width≤300μs, Duty Cycle≤0.5%

Typical Performance Characteristics

Figure1: Output Characteristics

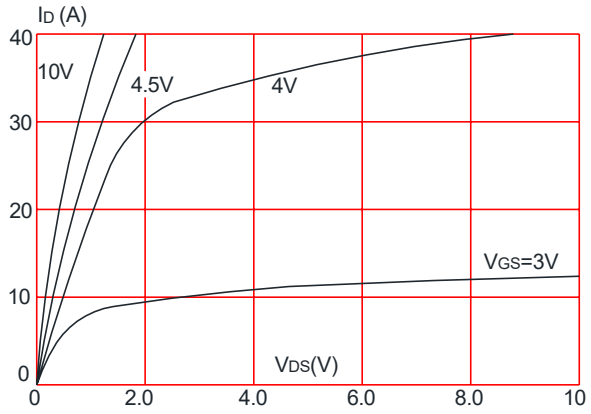


Figure 2: Typical Transfer Characteristics

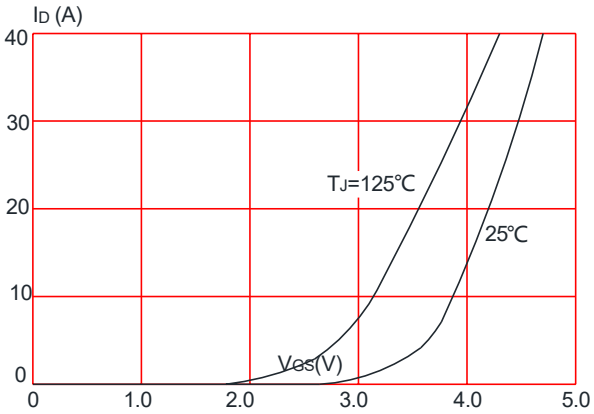


Figure 3: On-resistance vs. Drain Current

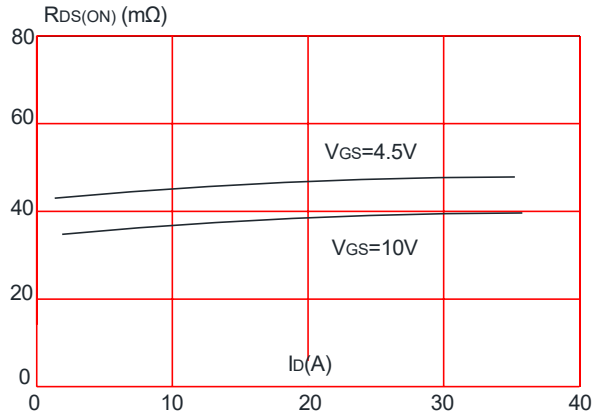


Figure 4: Body Diode Characteristics

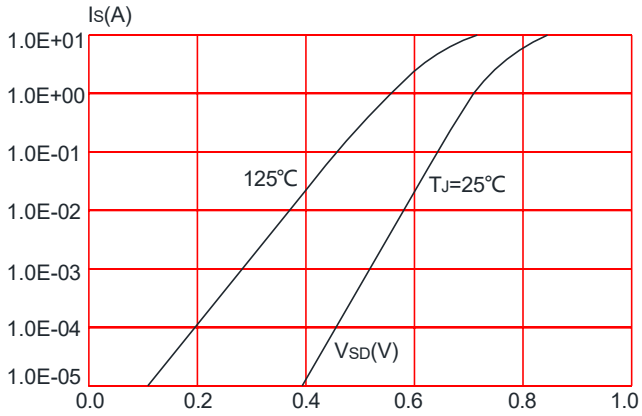


Figure 5: Gate Charge Characteristics

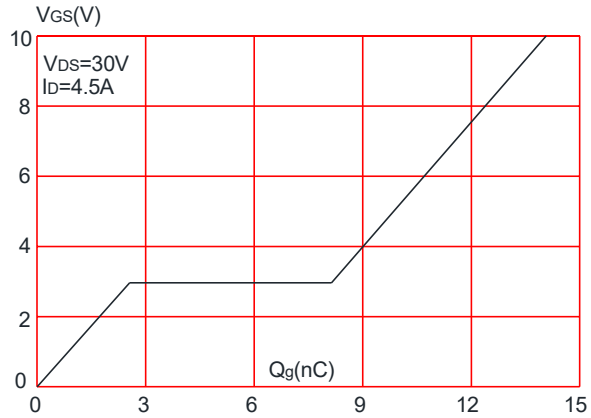


Figure 6: Capacitance Characteristics

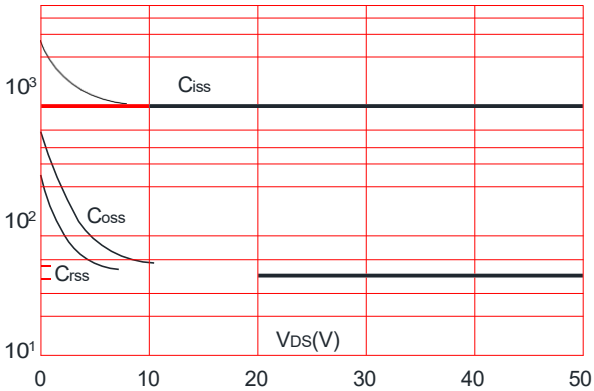


Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

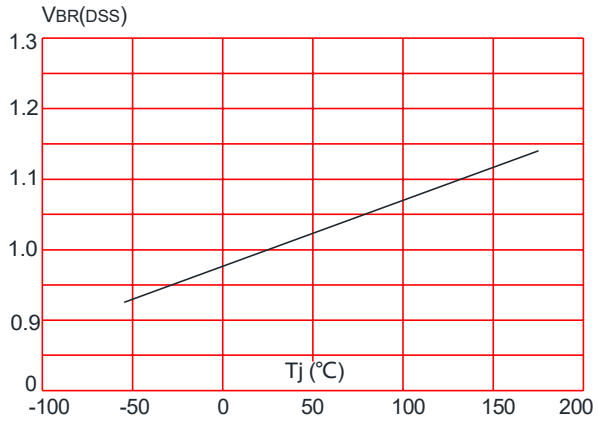


Figure 8: Normalized on Resistance vs. Junction Temperature

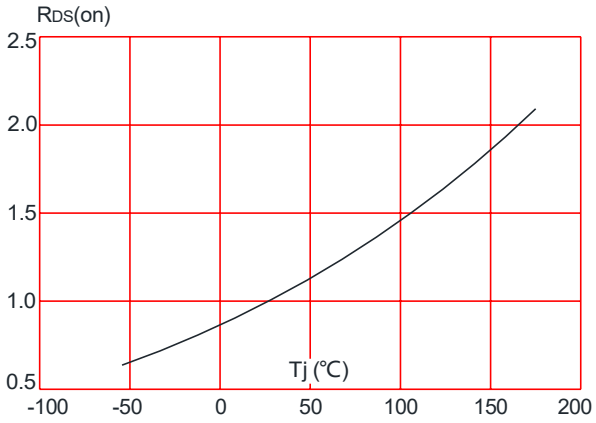


Figure 9: Maximum Safe Operating Area

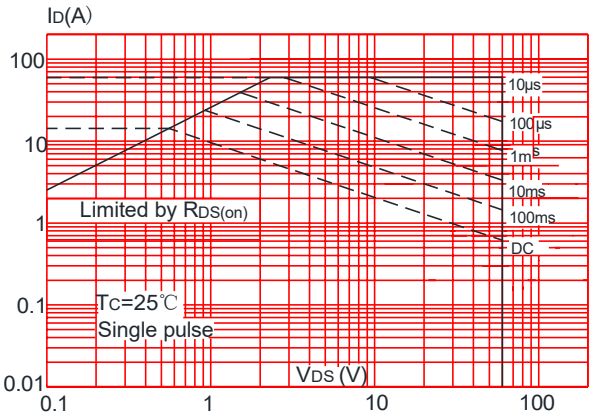


Figure 10: Maximum Continuous Drain Current vs. Case Temperature



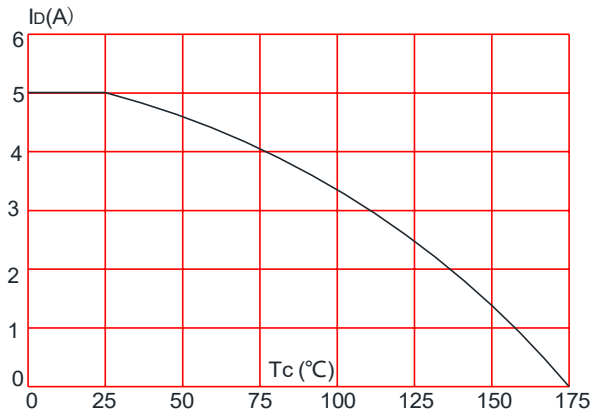


Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Case

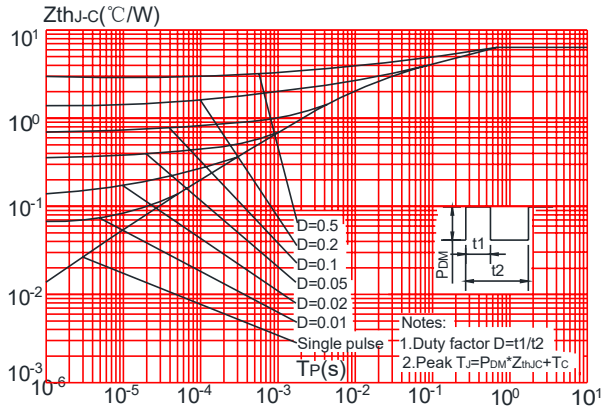

Package Mechanical Data-SOT-23-3L

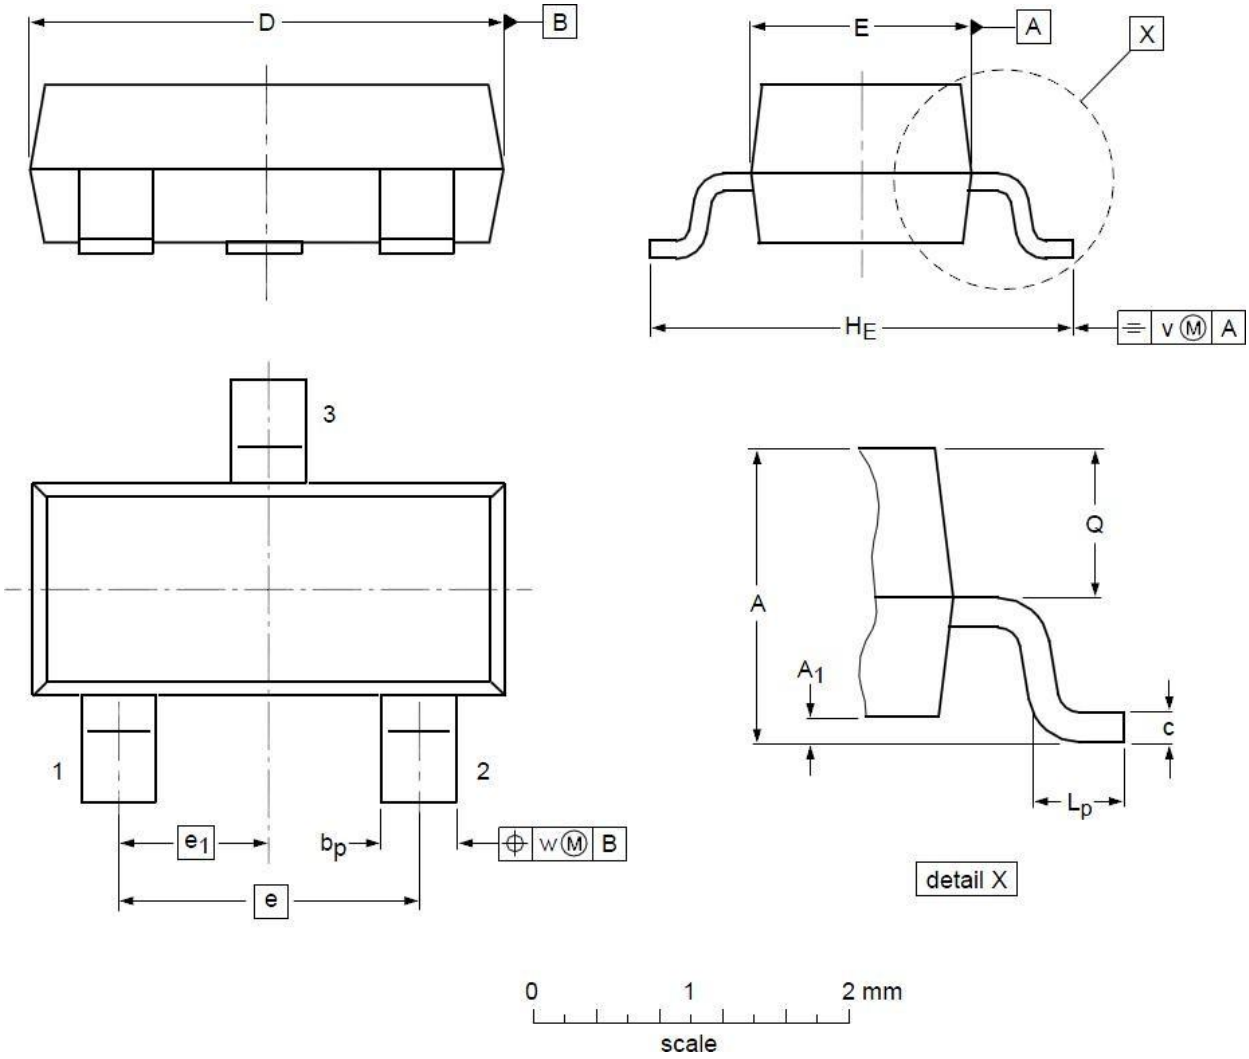

DIMENSIONS (unit : mm)

Symbol	Min	Typ	Max	Symbol	Min	Typ	Max
A	0.90	1.01	1.15	**A_1**	0.01	0.05	0.10
b_p	0.30	0.42	0.50	**c**	0.08	0.13	0.15
D	2.80	2.92	3.00	**E**	1.20	1.33	1.40
e	--	1.90	--	**e_1**	--	0.95	--
H_E	2.25	2.40	2.55	**L_p**	0.30	0.42	0.50
Q	0.45	0.49	0.55	**v**	--	0.20	--
w	--	0.10	--				