
ZX8810L Dual N-Channel MOSFET

$V_{(BR)DSS}$	$R_{DS(on)}$	I_D
20V	14.5mΩ@4.5V	7A
	15.6mΩ@3.8V	
	18.5mΩ@2.5V	
	28mΩ@1.8V	

SOT-23-6L




DESCRIPTION


The ZX8810L uses advanced trench technology to provide excellent

$R_{DS(ON)}$ and low gate charge. It is ESD protected. This device is suitable for use as a uni-directional or bi-directional load switch,facilitated by its common-drain configuration.

MARKING:



Equivalent Circuit

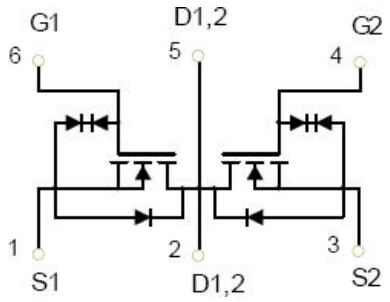

MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	±12	V
Continuous Drain Current	I_D	7	A
Pulsed Drain Current	I_{DM}*	30	A
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	83.3	℃/W
Operation Junction and Storage Temperature Range	T_J,T_{stg}	-55~+150	℃
Lead Temperature for Soldering Purposes(1/8" from case for 10 s)	T_L	260	℃

*Repetitive rating：Pluse width limited by junction temperature.

MOSFET ELECTRICAL CHARACTERISTICS


T_a=25℃ unless otherwise specified


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
STATIC PARAMETERS						
Drain-source breakdown voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D =250μA	20			V
Zero gate voltage drain current	I_{DSS}	V_{DS} =16V,V_{GS} = 0V			1	μA
Gate-body leakage current	I_{GSS}	V_{GS} =±4.5V, V_{DS} = 0V			±1	μA
		V_{GS} =±10V, V_{DS} = 0V			±5	μA
Gate threshold voltage (note 1)	$V_{GS(th)}$	V_{DS} =V_{GS}, I_D =250μA	0.4		1	V
Drain-source on-resistance (note 1)	$R_{DS(on)}$	V_{GS} =10V, I_D =3A	10.5	13.5	20	mΩ
		V_{GS} =4.5V, I_D =3A	11.5	14.5	22	mΩ
		V_{GS} =3.8V, I_D =3A	12.6	15.6	24	mΩ
		V_{GS} =2.5V, I_D =3A	14.5	18.5	26	mΩ
		V_{GS} =1.8V, I_D =3A	20.5	28	35	mΩ
Forward tranconductance (note 1)	g_{FS}	V_{DS} =5V, I_D =7A	9			S
Diode forward voltage(note 1)	V_{SD}	I_S=1A, V_{GS} = 0V			1	V
DYNAMIC PARAMETERS (note 2)						
Input Capacitance	C_{iss}	V_{DS} =10V,V_{GS} =0V,f =1MHz		1150		pF
Output Capacitance	C_{oss}			185		pF
Reverse Transfer Capacitance	C_{rss}			145		pF
Total gate charge	Q_g	V_{DS} =10V,V_{GS} =4.5V,I_D =7A		15		nC
Gate-source charge	Q_{gs}			0.8		nC
Gate-drain charge	Q_{gd}			3.2		nC
SWITCHING PARAMETERS(note 2)						
Turn-on delay time	$t_{d(on)}$	V_{GS}=5V,V_{DD}=10V, R_L=1.35Ω,R_{GEN}=3Ω		6		ns
Turn-on rise time	t_r			13		ns
Turn-off delay time	$t_{d(off)}$			52		ns
Turn-off fall time	t_f			16		ns


Notes :


1. Pulse Test : Pulse width≤300μs, duty cycle≤0.5%.
2. Guaranteed by design, not subject to production testing.


Typical Characteristics

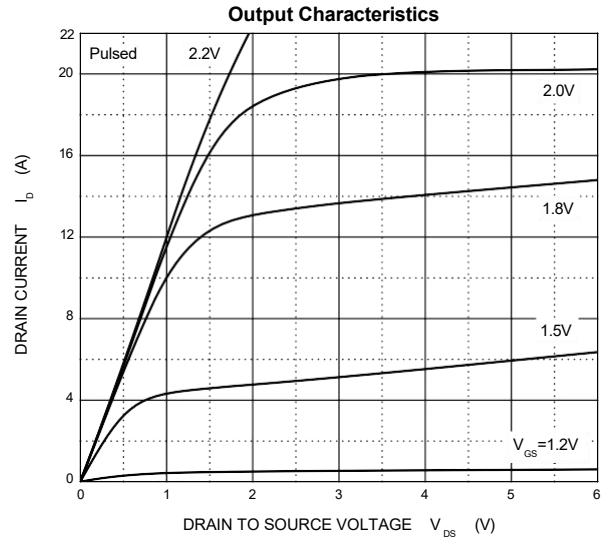


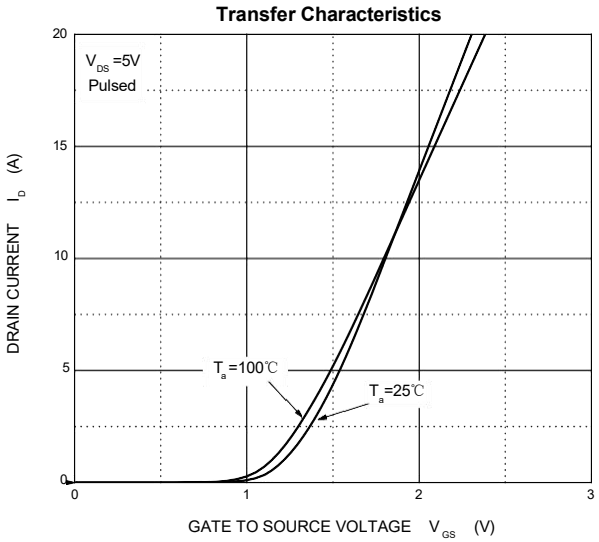

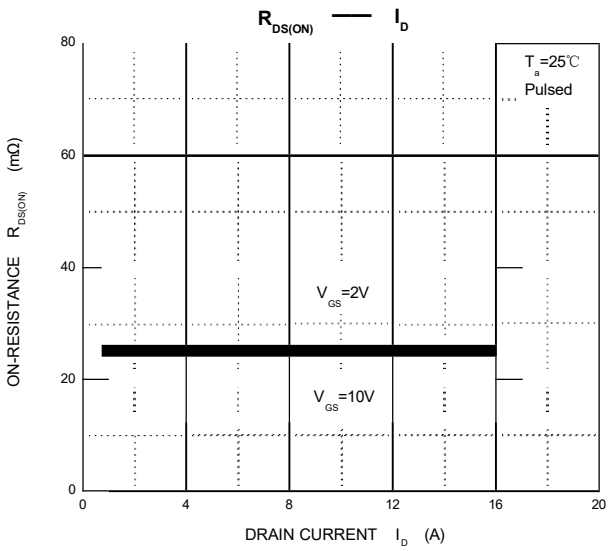


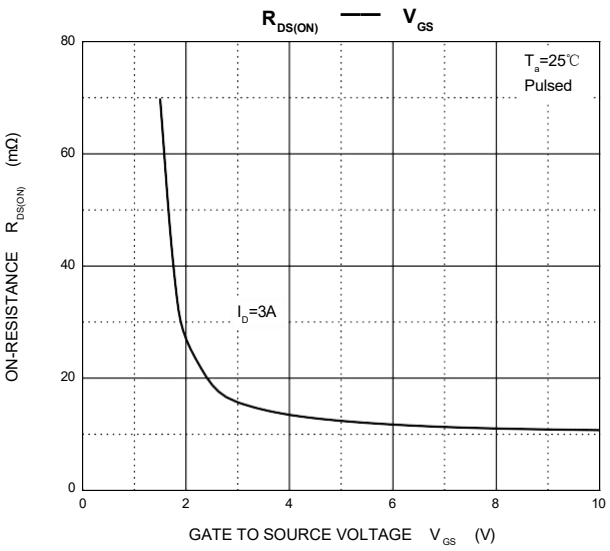


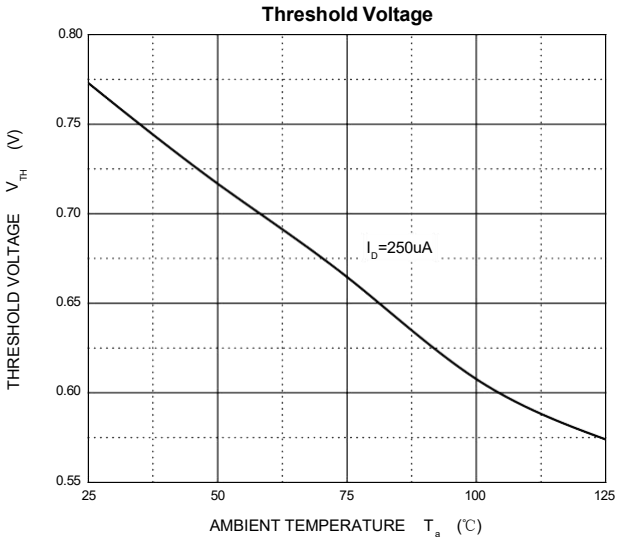

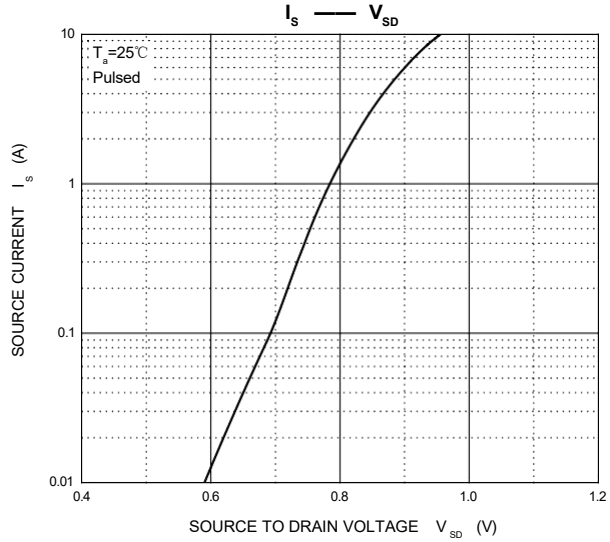


SOT-23-6L Package Outline Dimensions

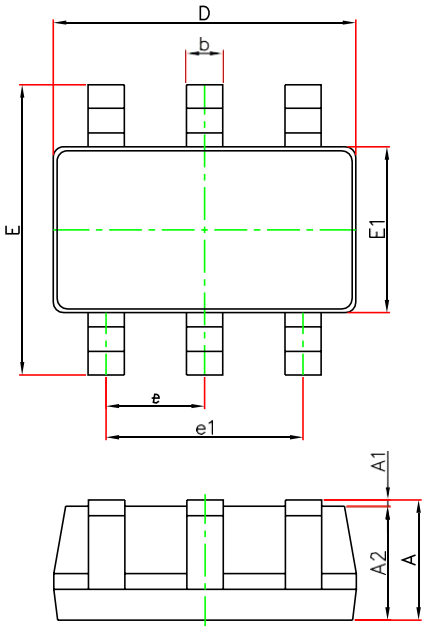

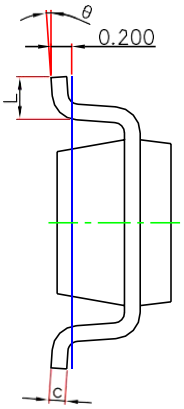

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°


SOT-23-6L Suggested Pad Layout

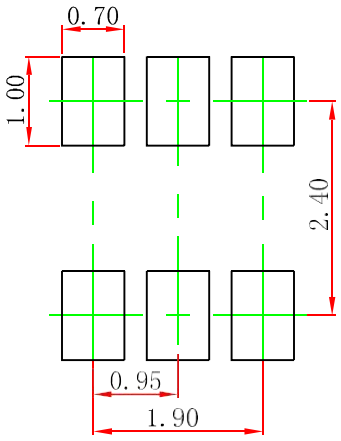

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.

SOT-23-6L Tape and Reel

SOT-23-6L Embossed Carrier Tape

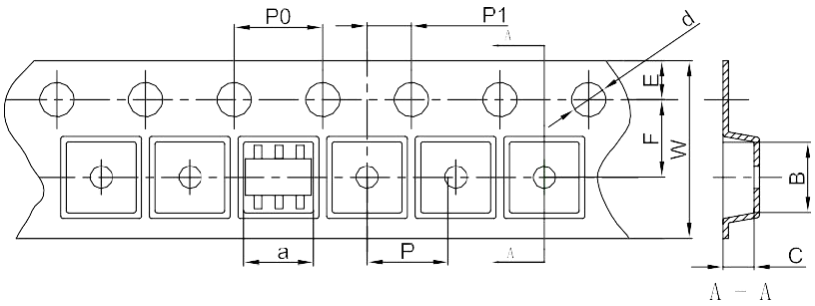


Packaging Description:


SOT-23-6L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 18.0cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	a	B	C	d	E	F	P0	P	P1	W
SOT-23-6L	3.17	3.23	1.37	Ø1.55	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23-6L Tape Leader and Trailer

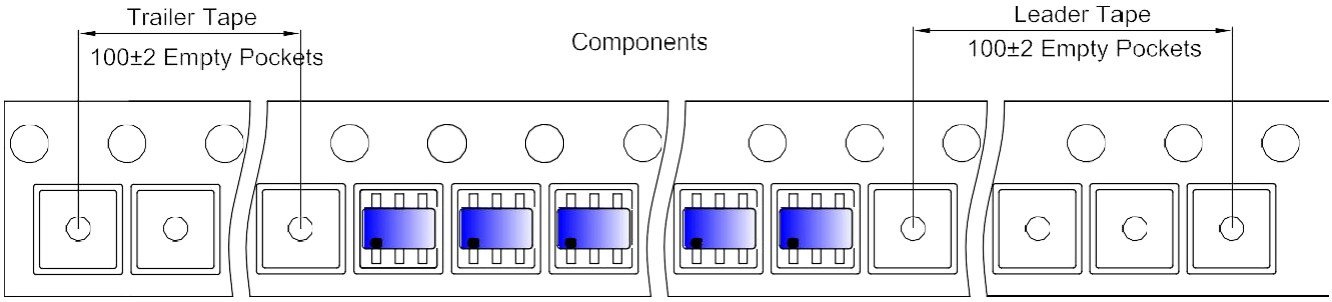

SOT-23-6L Reel

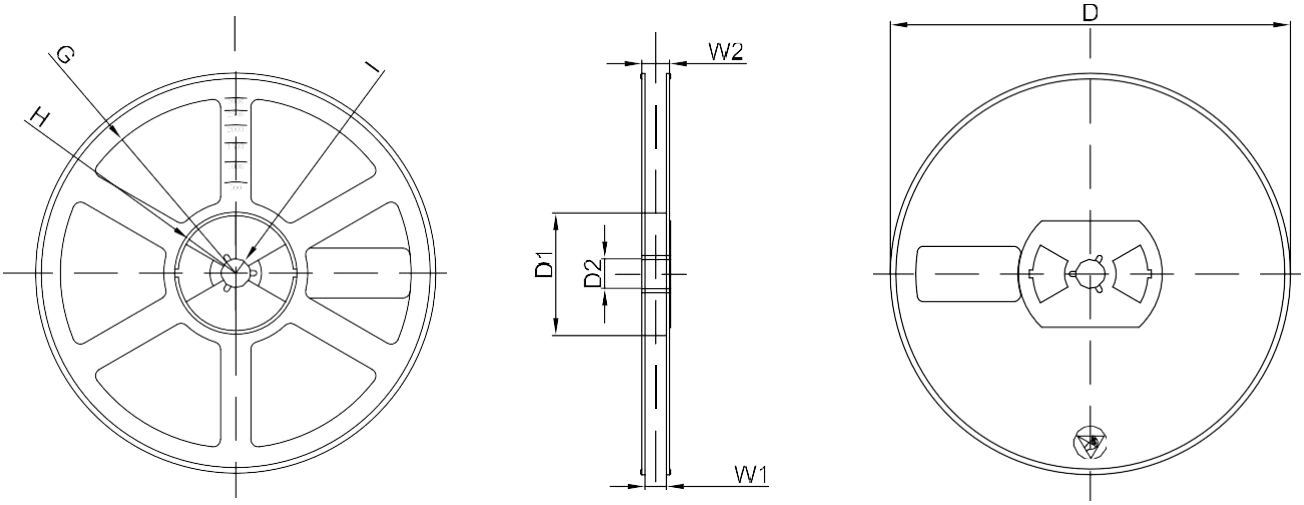

Dimensions are in m ‖ neter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø180.00	60.00	13.00	R78.00	R25.60	R6.50	9.50	13.10

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	